

HYDAPIPE®

Surface Mounted Double Shower System

- 1-921: Through wall piping configuration less soap dish
- 1-921C: Through wall wall piping configuration with cake soap dish affixed to unit

Each station consists of: Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Stainless steel covering to be 18 gauge with #4 brush finish.

Modifications:

Valve:

- Suffix 21: Single supply, manual shut off, 4 arm handle
- Suffix 22: Single supply, manual shut off, lever handle
- Suffix 60: Single supply, metering shut off
- Suffix 56: Pressure Balance and metering combination

Shower head:


- Suffix 270: Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 131: Super, ball joint, adjustable spray head
- Suffix 121: Super, ball joint, adjustable spray head with volume control
- Suffix 285: Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ: One way ball joint

Soap dish:

- Suffix CWM: Wall mounted cake soap dish

Hand spray accessories (Specify left or right unit location):

- Suffix FS: Hand spray, hose and wall hook
- Suffix FSB: Hand spray, hose and 30" slide bar
- Suffix OD: Quick disconnect for hand spray units

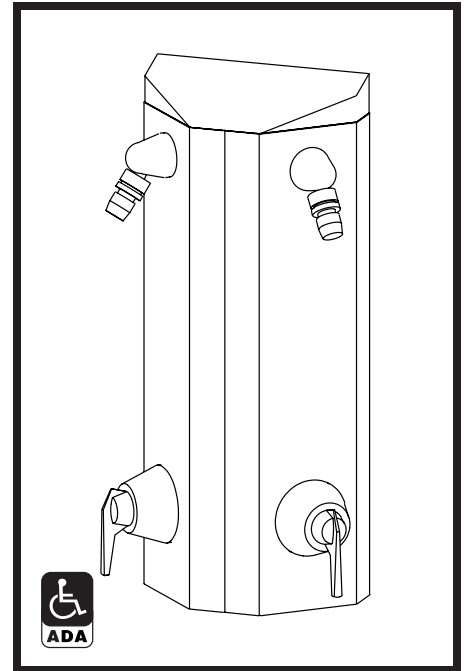

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....

Engineer

.....

Contractor

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
 Website: www.symmons.com ■ Email: customerservice@symmons.com

