

HYDAPIPE®

Flat Wall Mounted Shower System

- 1-911RS:** Through wall piping configuration with soap dish
- 1-911:** Through wall piping configuration less soap dish

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Recessed soap dish. Stainless steel covering to be 16 gauge with #4 brush finish.

Modifications:

Valve:


- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off
- Suffix 56:** Pressure Balance and metering combination

Shower head:

- Suffix 270:** Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 131:** Super, ball joint, adjustable spray head
- Suffix 121:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ:** One way ball joint

Soap dish:

- Suffix C:** Cake soap dish affixed to unit
- Suffix CWM:** Wall mounted cake soap dish

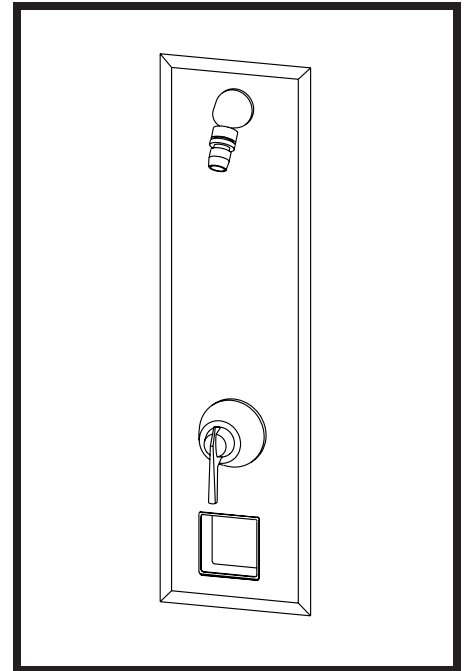

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....

Engineer

.....

Contractor

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2003, 2008 Symmons Industries, Inc. Printed in U.S.A. ■ 043008

