

COMMANDER®

4" Centerset Lavatory Combinations

SC-3064



GENERAL SPECIFICATION

Polished chrome plated Commander 4" centerset lavatory faucet with 1/4 turn ceramic cartridges covered by a 25-year warranty. Accommodates installations up to 7/8" thick. Water conserving flow control reduces flow to 2.2 gpm/8.4 lpm. Meets ASME A112.18.1/CSA B125.1 and NSF61.

4" Wrist Blade Handle Models

Vandal-resistant 4" wrist blade handles with color-coded indexes.

- ☐ **SC-3064** Solid brass 1-1/4" pop-up drain
- ☐ **SC-3074** Strainer drain
- ☐ **SC-3074-LD** No drain assembly

6" Wrist Blade Handle Models

Vandal-resistant 6" wrist blade handles with color-coded indexes.

- ☐ **SC-3066** Solid brass 1-1/4" pop-up drain
- ☐ **SC-3076** Strainer drain
- ☐ **SC-3076-LD** No drain assembly

SC-3066



OPTIONS

SUFFIX	DESCRIPTION
☐ BO	0.5 gpm flow control, vandal-resistant
☐ CA**	Low lead for CA AB1953 compliance
☐ GB	1.5 gpm flow control, vandal-resistant
☐ LD	Less drain assembly (SC-3064 & SC-3066 only)
☐ LF	2.2 gpm laminar flow control outlet
☐ MI	Metal index for handles
☐ VR	Vandal-resistant outlet device



** The following options are not available with the "CA" option:
HS (Hose & Spray), SO, TWI, VB6, VB8, ST, SVV, & TMV.

This space for Architect/Engineer approval.





Rough-Ins

SC-3064

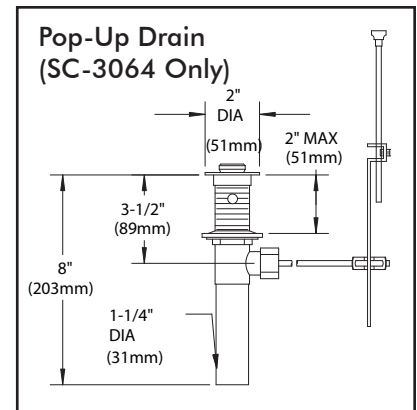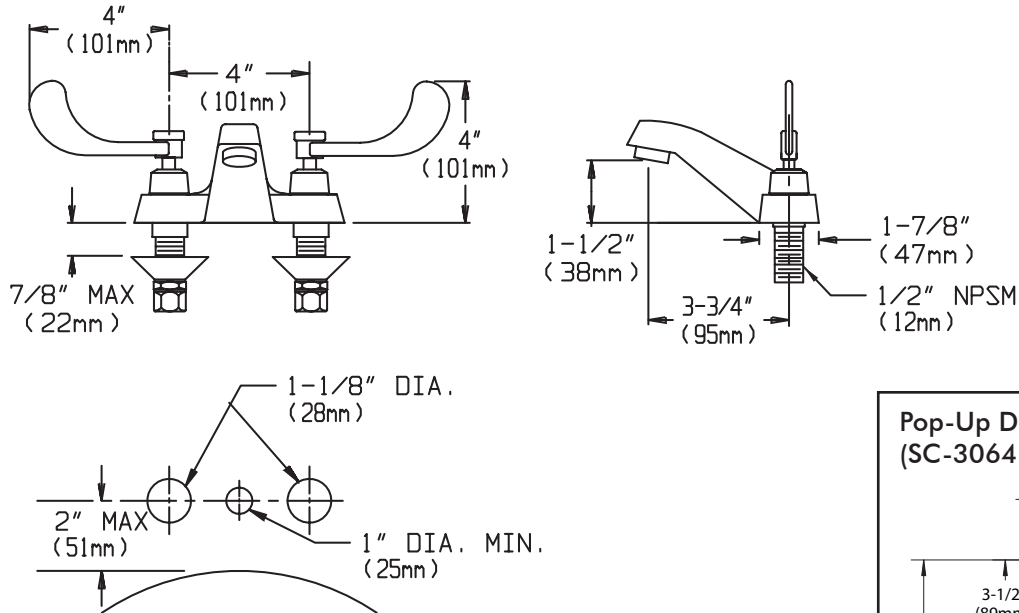

SC-3066

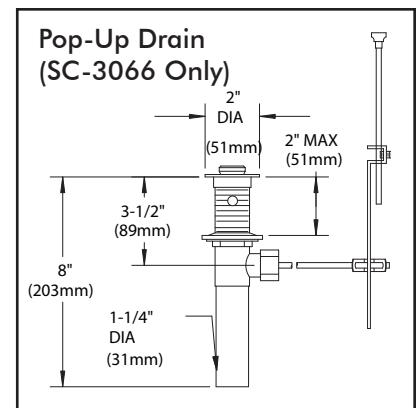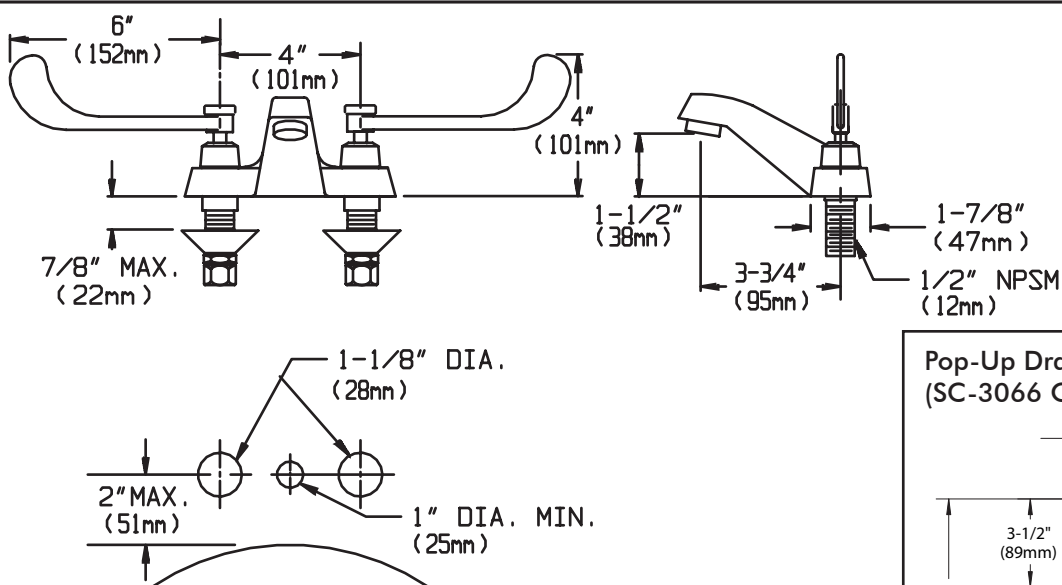

NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Lavatory inlets are sized for either coupling or sweat connections. Unless otherwise specified, all inlets are 1/2" NPSM.