

## VERSATILE™

SM-3070



## Shower Combination

### □ SM-3070

Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure shower valve and hand-held spray combination. Chrome plated brass wall plate with metal index. Chrome plated brass lever handle. Independent center sleeve allows up to 1" of rough-in variation. Adjustable temperature limit stop. Brass body. Pressure balancing & ceramic temperature regulating cartridge with built-in check valves. Four port valve with 1/2" female copper sweat inlets and shower outlet (tub outlet 1/2 NPT female). Chrome plated transfer valve with brass lever handle and escutcheon. S-2270-AF Cosmopolitan® showerhead with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum to meet existing ASME A112.18.1/CSA B125.1 standard. S-2500 shower arm and wall flange. S-1556 chrome plated tub spout diverter. In-line vacuum breaker. VS-100-AF handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum, to meet existing ASME A112.18.1/CSA B125.1 standard. Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. 69" square lock stainless steel hose with rubber liner. Chrome plated brass supply elbow with wall flange. Two wall mounted posts. Swivel connector. Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards.

### OPTIONS

SUFFIX	DESCRIPTION
--------	-------------


- |       |  |
|-------|--|
| □ IS  | Integral stops                           |
| □ LH  | Less showerhead                          |
| □ PC  | VS-100-PC handheld shower, chrome finish |
| □ VH  | 69" white vinyl hose                     |
| □ 1   | S-2251-AF showerhead                     |
| □ 2   | S-2252-AF showerhead                     |
| □ 2VR | S-2252-AF vandal-resistant showerhead    |
| □ 3   | S-2253-AF showerhead                     |
| □ 4   | S-2220-AF showerhead                     |
| □ 6   | S-2288-AF showerhead                     |
| □ 7   | S-2291-AF showerhead                     |
| □ 9   | S-2292-AF showerhead                     |

This space for Architect/Engineer approval.



## Rough-Ins

**SM-3070**

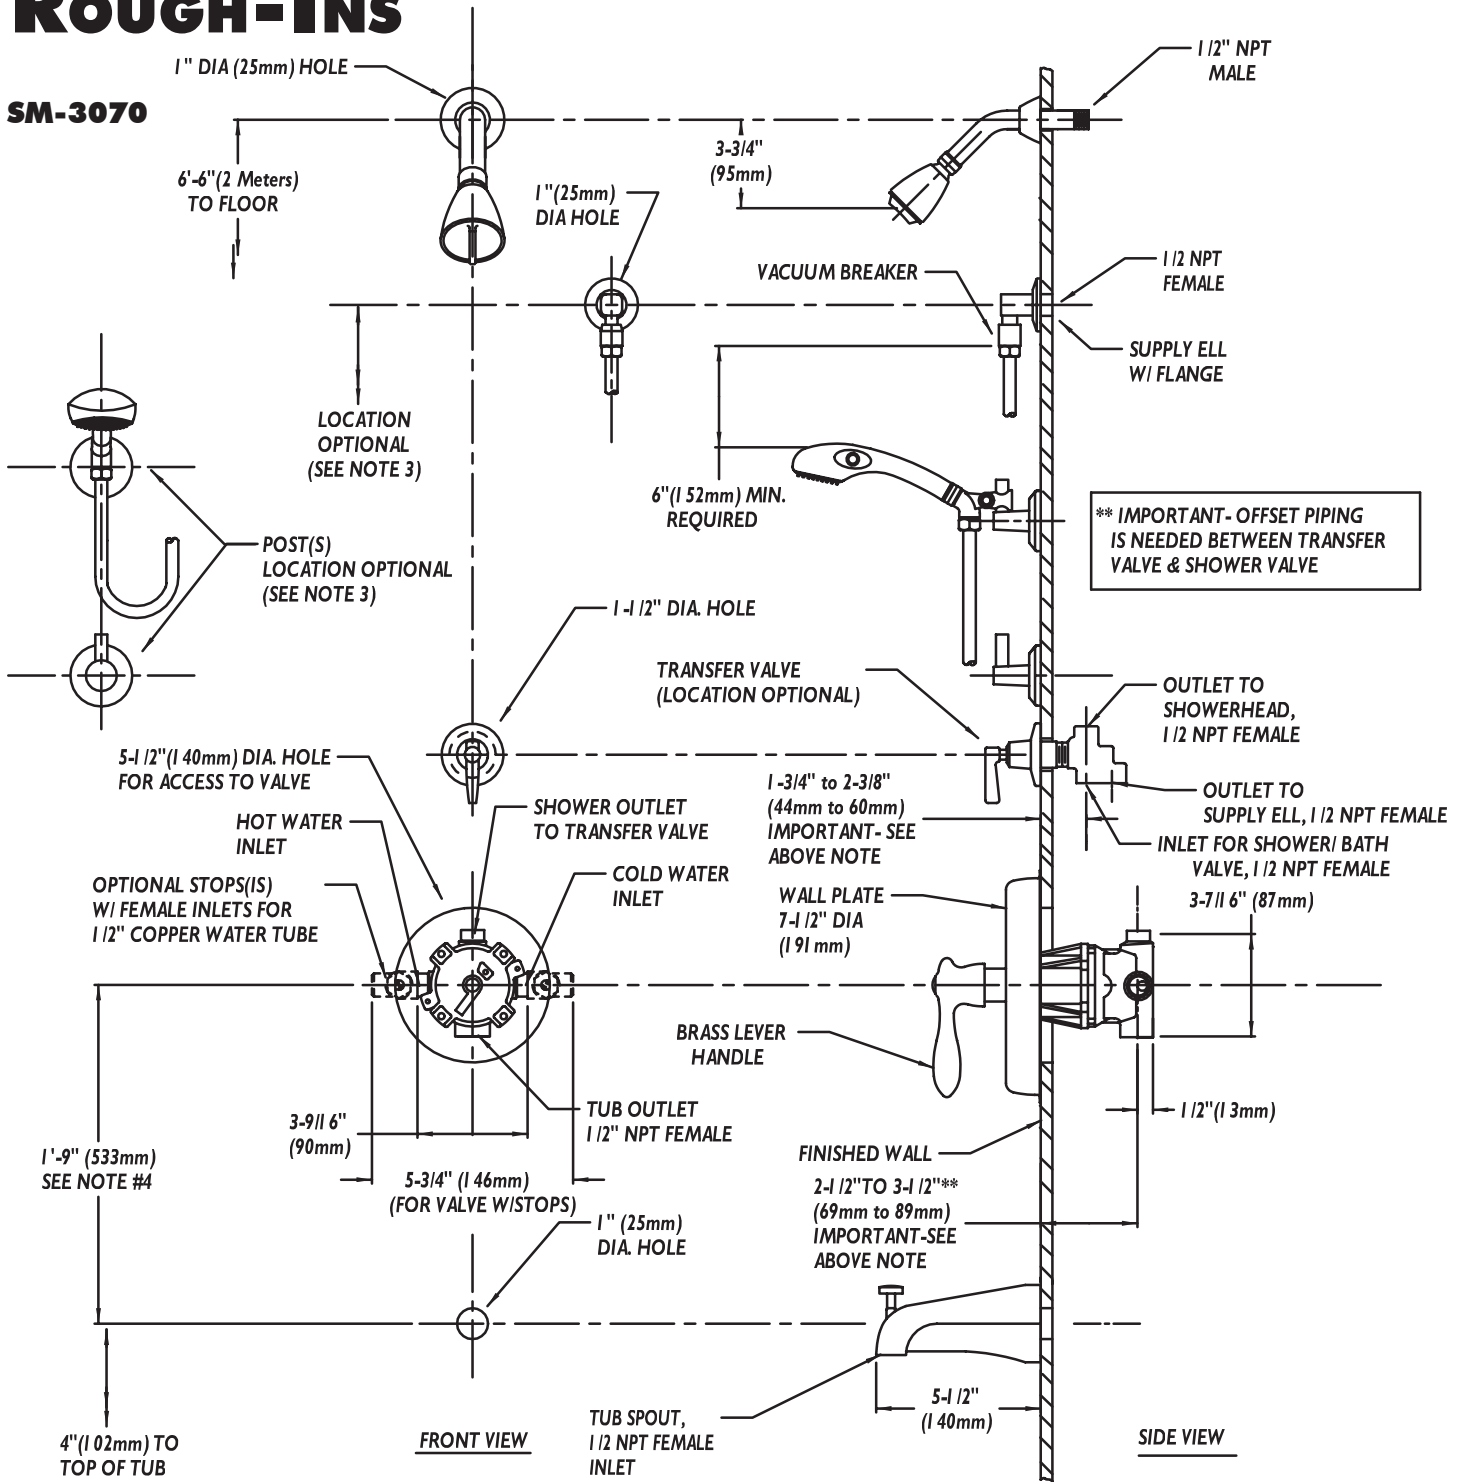

NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. The location of the wall mounted posts and supply ell are optional, but restricted by the 69" hose length running from supply ell connection to hand shower and the 6" minimum requirement between the in-line vacuum breaker & top of hand shower. For ADA mounting locations consult ADAAG, ANSI A117.1, or state regulations.