

## VERSATILE™

SM-3080-ADA



## Balanced Pressure Handicap Shower Combination

### □ SM-3080-ADA

Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure shower valve and handheld spray combination. Chrome plated brass wall plate with metal index. Chrome plated brass lever handle. Independent center sleeve allows up to 1" of rough-in variation. Adjustable temperature limit stop. Brass body. Pressure balancing & ceramic temperature regulating cartridge with built-in check valves. Four port valve with 1/2" female copper sweat inlets and shower outlet (tub outlet 1/2 NPT female).

Furnished with 1/2 pipe plug. In-line vacuum breaker. VS-100-AF handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum, to meet existing ASME A112.18.1/CSA B125.1 standard. Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. Chrome 5' metal shower hose, 1/2" NPSF connectors. Swivel arm holder. 24" combination slide bar and grab bar, stainless steel and chrome. Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards.

### OPTIONS

SUFFIX	DESCRIPTION
--------	-------------


- |                             |  |
|-----------------------------|--|
| <input type="checkbox"/> IS | Integral stops                           |
| <input type="checkbox"/> PC | VS-100-PC handheld shower, chrome finish |

This space for Architect/Engineer approval.



## Rough-Ins

SM-3080-ADA

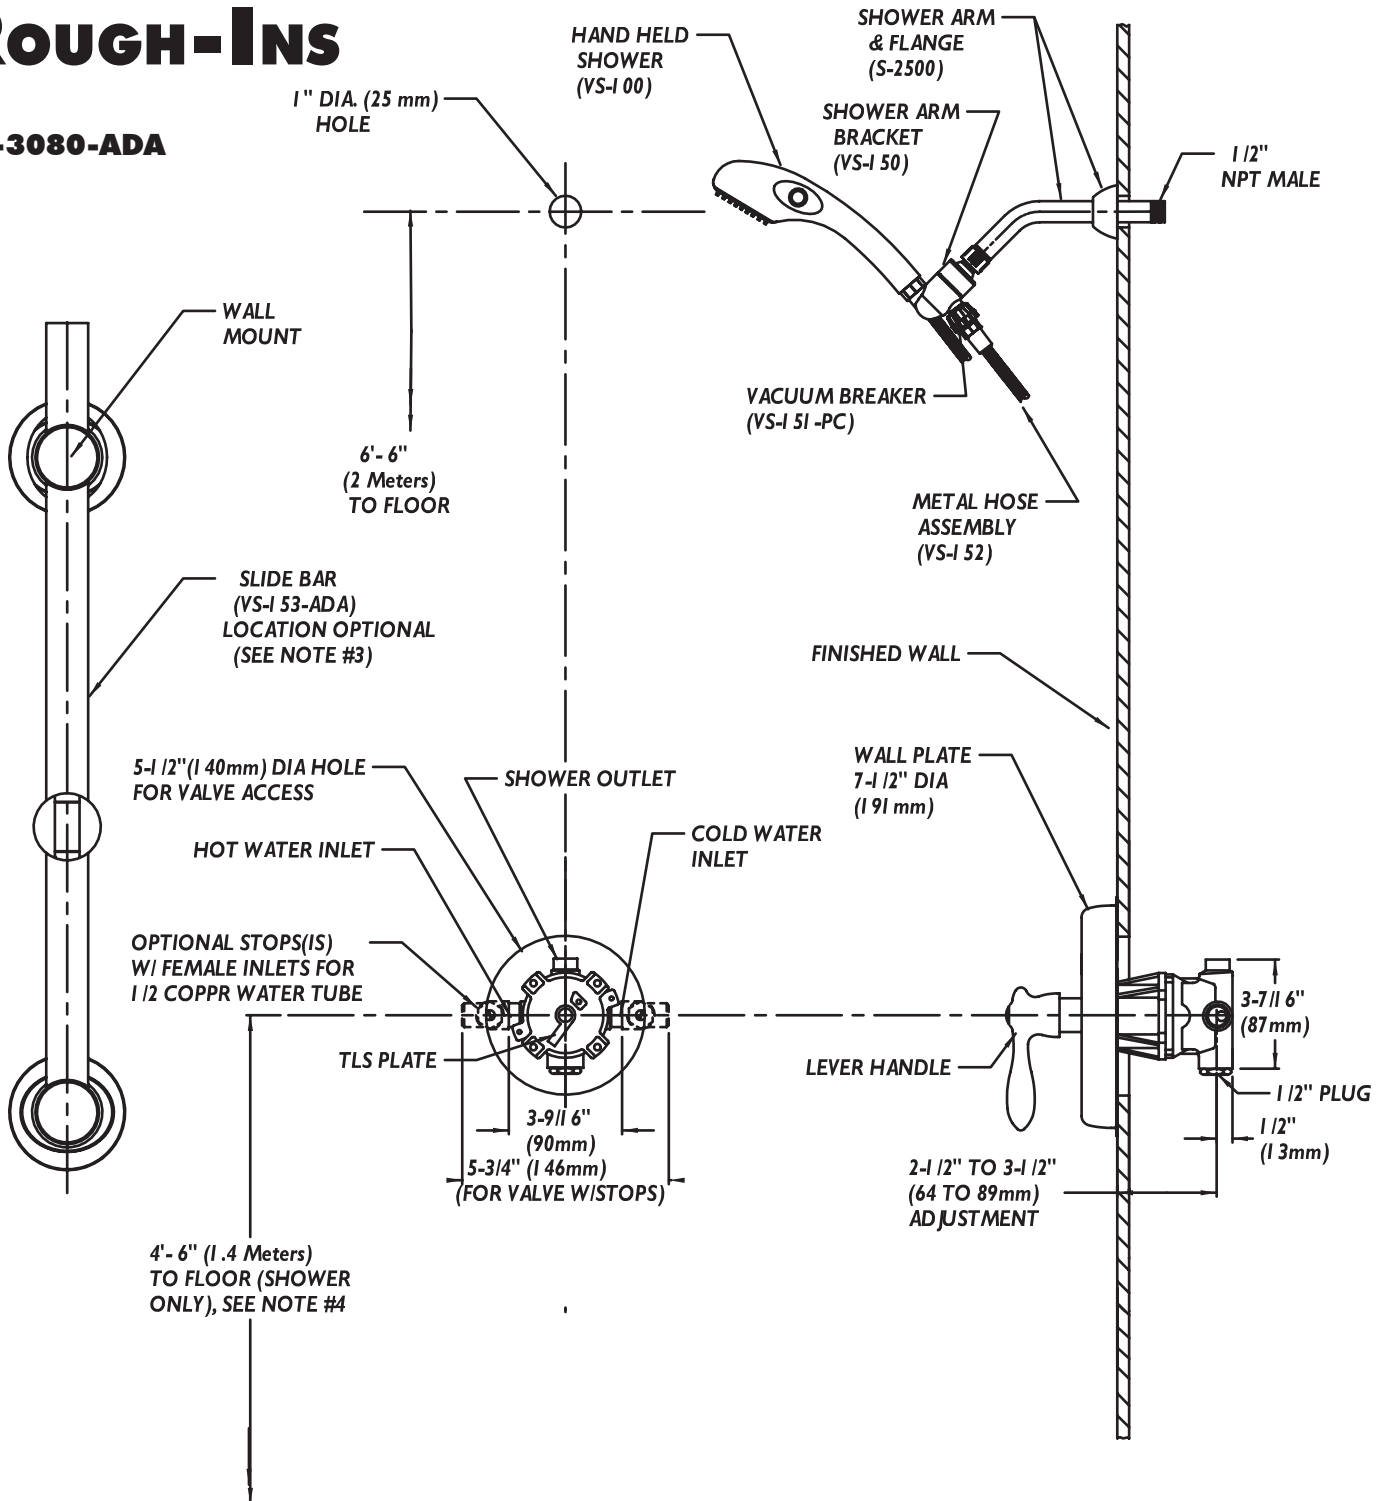

NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. The location of the slide bar is optional, but restricted by the 69" hose length running from shower arm bracket connection to hand held shower and see ICCIANSI A117.1 standard and/or ADA accessibility guidelines for building and facilities (ADAAG) for installation locations and required dimensions based on your specific shower configuration.