SPEAKMAN[®]

VERSATILE

SM-4451-SCS



Shower Combination &

□ SM-4451-SCS

Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure shower valve with integral volume control/diverter and spring check stops and handheld spray combination. Chrome plated brass wall plate with decorative etched metal index. Chrome plated brass Revere handle. Independent center sleeve allows up to 1" of rough-in variation. Adjustable temperature limit stop. Brass body. Pressure balancing module. Ceramic temperature regulating module. Four port valve with 1/2" female copper sweat inlets and outlet. 1/2" female NPT tub outlet. S-1554 chrome plated tub spout. In-line vacuum breaker. VS-100-AF handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum, to meet existing ASME A112.18.1/CSA B125.1 standard. Non-positive shutoff meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. 69" square lock stainless steel hose with rubber liner. Chrome plated brass supply elbow with wall flange. 30" slide barwith mounting screws. Swivel connector. Meets ASSE 1016, 1989 standard.


OPTIONS

SUFFIX	DESCRIPTION
	VS-100-PC handheld shower, chrome finish 69" white vinyl hose



Rough-Ins

SM-4451-SCS

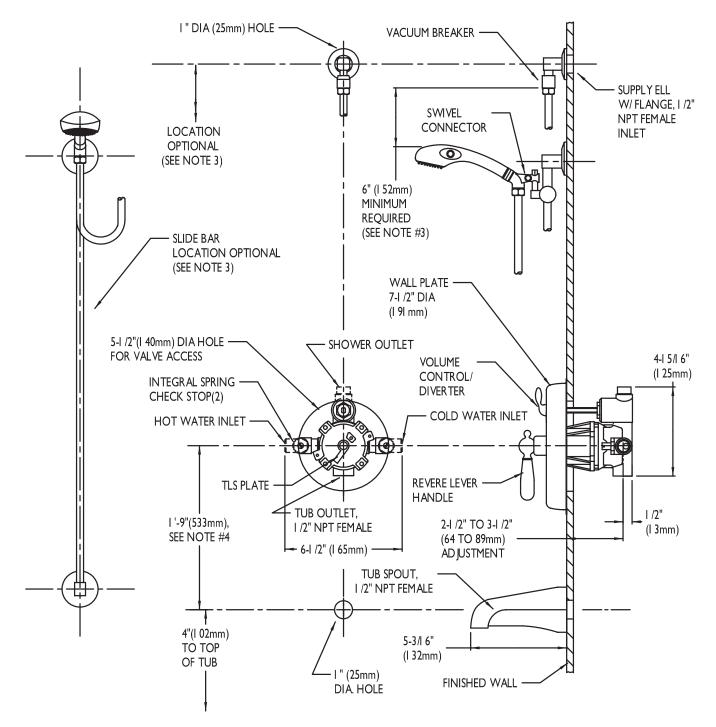

NOTE: 1. Unless otherwise specified, all dimensions are in inches (millimeters) and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. 3. The locations of the slidebar and supply ell are optional, but restricted by the 69" hose length running from the supply ell connection to the hand shower and the 6" minimum requirement between the in-line vacuum breaker and the top of the hand shower (hand shower adjusted to the highest position). 4. For ADA mounting locations consult ADAAG, ANSI A117.1, or state regulations.