MECHANICAL FAUCETS 1322-205AGVCP

CHICAGO FAUCETS a Geberit company

Remote Valves

Pr	od	luct	: T\	/pe
	-		,	,

Laboratory Remote Valves

Features & Specifications

- 2 1/2" Cross Handle
- Needle Valve Compression Operating Cartridge
- 3/8" 18 NPT Female Thread Inlet

Warranty

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

Codes & Standards

• ANSI Z21.15b-2006/CSA 9.1b-2006

Job Name					
Item Number					
Section/Tag					
Model Specified					
Architect					
Engineer					
Contractor					
[] Submitted as Shown	[] Submitted with Variations				
Date					






1322-205AGVCP

Remote Valves



Architect/Engineer Specification

Chicago Faucets No. 1322-205AGVCP polished chrome plated solid brass construction. 2 1/2" black nylon cross handle(s) with tapered square and air, gas or vac button. Integral inlet shank(s) contains standard 3/8" - 18 NPT female thread inlet. Mounting hardware included.

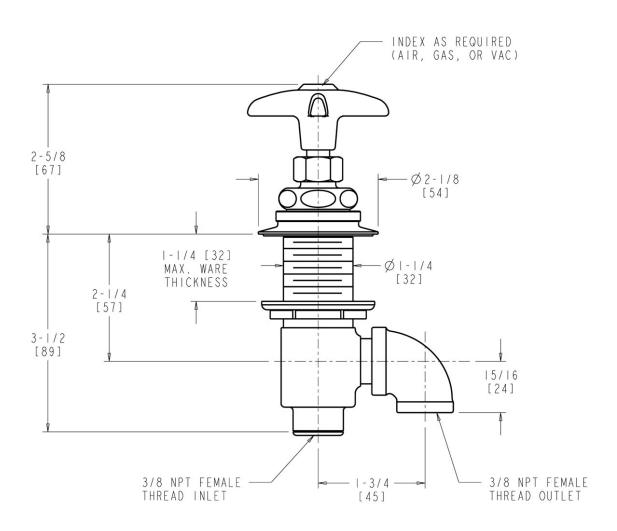

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE