ACCESSORIES AND PARTS 1366-NF



P	ro	d	u	ct	Ty	/	D	e
	. •	•	•		-)	, ,	~	_

Twist Drain

Features & Specifications

- 1-1/2" NPT Male/Female or 2" NPT Male Thread Outlet
- For 3-1/2" Sink Opening

Job Name						
Item Number						
Section/Tag						
Model Specified						
Architect						
Engineer						
Contractor						
[] Submitted as Shown	[] Submitted with Variations					
Date						




2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454



Architect/Engineer Specification

Chicago Faucets No. 1366-NF. Integral inlet shank(s). 1-1/2" NPT male/female or 2" NPT male thread outlet. For 3-1/2" sink opening. Mounting hardware included.

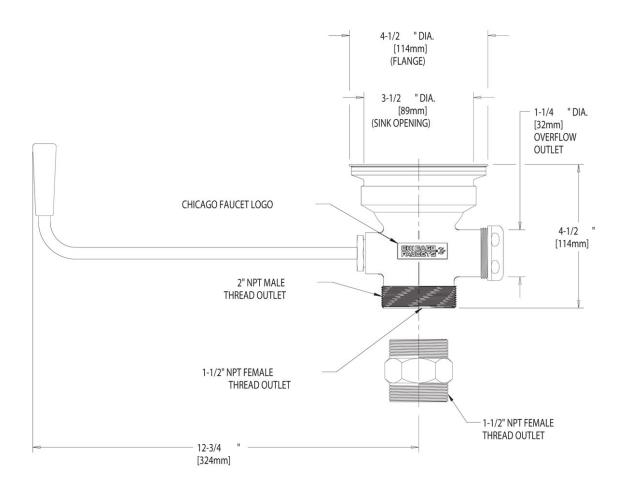

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE