

MANUAL FAUCETS

2304-CP



Marathon™ Kitchen Faucet with Side Spray

Product Type

Marathon™ Kitchen Faucet with Side Spray

Features & Specifications

- 8" C-C Rigid/Swing Gooseneck Spout
- 2.2 GPM (8.3 L/min) Pressure Compensating Softflo® Aerator
- 2 3/4" Metal Lever Handle with Color Coded Temperature Indicator on Cap
- Ceramic Disc Operating Cartridge with Temperature Limit Stop
- 3/8" O.D. Copper Supply Tube Inlets
- Side Hose and Hand Spray

Performance Specification

- Rating Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

Warranty

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

Compliant To

- ASME A112.18.1M
- CSA B125.1
- NSF 61, Section 9
- ADA ANSI/ICC A117.1

Job Name _____

Item Number _____

Section/Tag _____

Model Specified _____

Architect _____

Engineer _____

Contractor _____

☐ Submitted as Shown ☐ Submitted with Variations

Date _____




2100 South Clearwater Drive
Des Plaines, IL
P: 847/803-5000
F: 847/803-5454
Technical: 800/TEC-TRUE
www.chicagofaucets.com

Marathon™ Kitchen Faucet with Side Spray

Architect/Engineer Specification

Chicago Faucets No. 2304-CP, polished chrome plated solid brass body and spout. 8" C-C rigid/swing gooseneck spout. 2.2 GPM pressure compensating aerator outlet. Metal lever handle with temperature limit stop and volume control. Side hose and spray. Ceramic mixing cartridge. 3/8" Copper tube supply inlets. All mounting hardware is included for standard lavatory installations. This product meets ADA requirements and is tested and certified to industry standards: ASME A112.18.1, NSF 61 Sec. 9, and CSA B125.

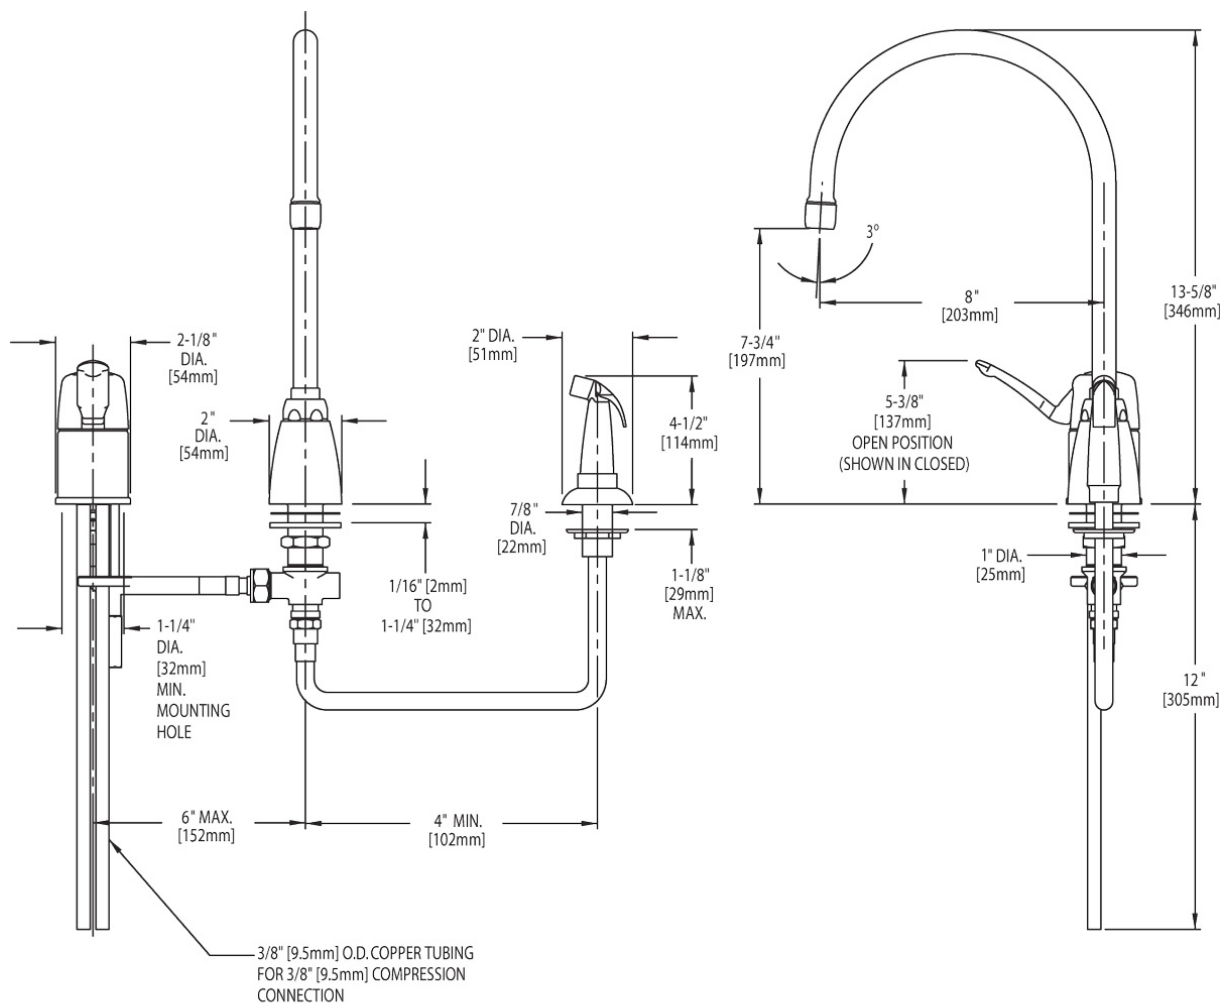

THIS VIEW SHOWN
LESS SPRAY

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive
Des Plaines, IL
P: 847/803-5000
F: 847/803-5454
Technical: 800/TEC-TRUE
www.chicagofaucets.com