

GENERAL

#18 gauge, type 304, nickel bearing stainless steel wall mounted multiple station drinking fountain – designed to meet all sanitary codes. Unit has stream splitter design basins with perforated grid strainers. Hooded stream projectors have in-line flow regulators – 20 to 105 psi. Separate push button controls are mounted on front. Exposed surfaces are hand blended to a lustrous LK-6K satin finish. Wall hanger furnished.

NO LEAD DESIGN

THIS DRINKING FOUNTAIN COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.

Elkay Drinking Fountains are manufactured with a waterway system utilizing copper components and completely lead-free material. These waterways have no lead because all leaded materials, such as leaded brass, have been removed.





This drinking fountain is classified by Underwriters Laboratories Inc. in accordance with **ANSI/NSF61**, **Section 9-1997b**.

CONSTRUCTION

EDF310C furnished complete with bubbler and drain assemblies.

Exclusive Flexi-Guard® Safety Bubbler*: Innovative design utilizes a pliable polyester elastomer to prevent accidental mouth injuries. Flexes on impact, then returns to original position. Strong. Abrasion-resistant. Anti-sweat.

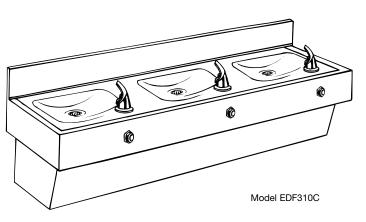

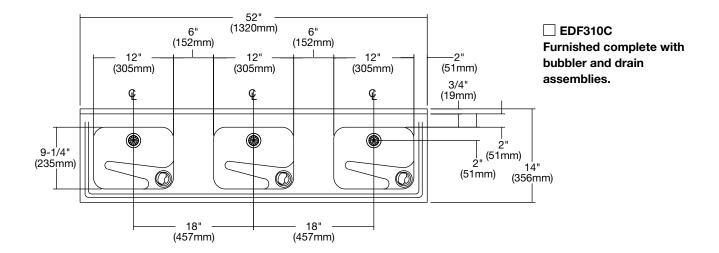

*Patent #4,481,971



INSTALLER NOTE

THIS DRINKING FOUNTAIN IS FURNISHED WITH A BUBBLER AND VALVE INCLUDING ALL CONNECTING FITTINGS WHICH ARE MANUFACTURED OF COMPLETELY LEAD FREE MATERIAL. IT IS RECOMMENDED THAT SHUT OFF VALVE AND SUPPLY TUBING SUPPLIED BY OTHERS BE NON-METALLIC.

OPERATION OF QUICK CONNECT FITTINGS

