

GENERAL

Wall mounted freeze-resistant drinking fountain for all weather applications. Constructed of #18 gauge, type 304, stainless steel polished to a satin finish. Includes freeze-resistant box LKFRB1 to be mounted on interior heated wall where the temperature does not drop below 50°F (10°C).

Contoured basin minimizes splashing with vandal-resistant bubbler keyed in location to prevent rotation. Heavy-duty push-button control is vandal-resistant.

NO LEAD DESIGN

THIS DRINKING FOUNTAIN COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.


Elkay Drinking Fountains are manufactured with a waterway system utilizing copper components and completely lead-free material. These waterways have no lead because all leaded materials, such as leaded brass, have been removed.


This fountain is certified by WQA to lead-free compliance including NSF/ANSI 61-ANNEX G, AB 1953.

CONSTRUCTION

EDFP210FPK furnished complete with vandal-resistant bubbler, heavy-duty push-button and vandal-resistant bottom cover plate.

LKFRB1 includes box with separate front louvered panel. Flow regulator provides constant stream from 20 to 105 psi water pressure. Operated by adjustable cable system. Trap and drain tube included for proper installation.



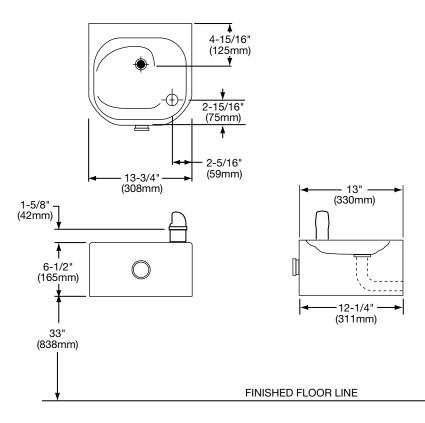

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


2222 Camden Court Oak Brook, IL 60523


No Lead Freeze-Resistant Drinking Fountain Soft Sides[®] – Wall Mount – Fully Exposed ANSI/NSF61 Compliant Model EDFP210FPK



INSTALLER NOTE

THIS DRINKING FOUNTAIN IS FURNISHED WITH A BUBBLER AND VALVE INCLUDING ALL CONNECTING FITTINGS WHICH ARE MANUFACTURED OF COMPLETELY LEAD FREE MATERIAL. SHUT OFF VALVE (NOT FURNISHED) TO ACCEPT 3/8" O.D. UNPLATED COPPER TUBE.

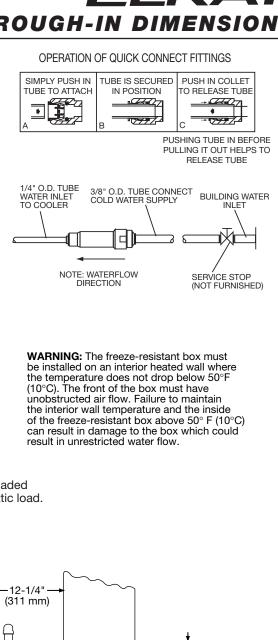

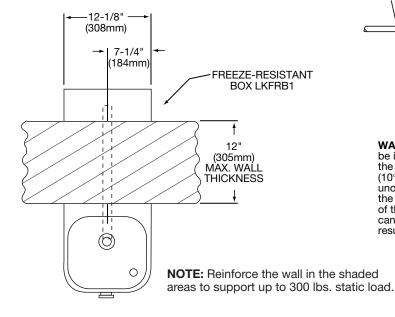

4" 4" (102mm) (102mm) 3-1/8 7/8" DIA. (22mm) HOLE FOR (80mm) WATER SUPPLY TUBE 3-15/16" MOUNTING BOLT LOCATIONS (100mm) (4) (3/8" DIA. NOT PROVIDED) 1-1/4" 1-11/16 (32mm) (43mm) 4-15/16" (125mm) ŧ ŧ 3/16" (4mm) 7/8" DIA. (22mm) HOLE FOR **OPERATING CABLE** \oplus 1-3/4" (44mm) HOLE FOR WASTE LINE (130mm) ¢ 23-11/16" 34-9/16" 5-1/8" (602mm) (878mm) (130mm) 20-3/16" 12" 2-5/8" (513mm) (305mm) 19-1/8" (67mm) MÀX. WAĹL (486mm) THICKNESS 3-5/8" (92mm) **FINISHED FLOOR**

NOTE: ALL DIMENSIONS ARE TAKEN FROM THE FINISHED FLOOR ON THE SIDE OF THE WALL THAT THE FOUNTAIN IS ON.