

ELKAY[®]

SPECIFICATIONS

EZH2O™ – In-Wall Recessed Bottle Filling Station Models EZWSM8K & EZWSMDK


PRODUCT FEATURES

- Designed specifically for use with SwirlFlo[®] and Soft Sides[®] architectural fountains
- Space saving ADA-compliant design
- Sanitary, no-touch, sensor activation with automatic 20-second shut-off timer
- Silver ion anti-microbial protection
- Quick fill rate is 1.1 gpm for refrigerated units and 1.5 gpm for non-refrigerated units
- Visual user interface display includes:
 - Green Ticker counts the quantity of bottles saved from the landfill
- Includes mounting frame for quick and simple installation
- Hinged door for easy servicing
- Constructed of durable 18 gauge stainless steel and ABS plastic

Model EZWSM8K provides 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water. Model EZWSMDK is non-refrigerated and provides ambient water. Shall be recessed design and constructed of 18 gauge Type 300 series stainless steel and ABS plastic. Shall include electronic sensor for no-touch activation with automatic 20-second shut-off timer. Shall provide 1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include antimicrobial protected plastic components to prevent mold and mildew. Shall meet ADA guidelines for reach ranges, when properly installed. Shall be lead-free design which meets Safe Drinking Water Act and is certified to NSF/ANSI 61 and California AB1953. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120.

SUGGESTED SPECIFICATION

IMAGES

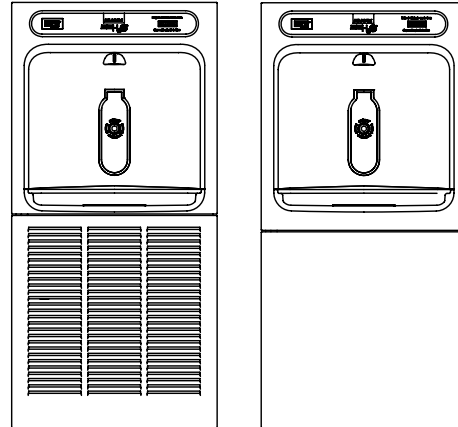

Model EZWSM8K
(refrigerated)

Model EZWSMDK
(non-refrigerated)

- 36292C Receptacle Adaptor Plug

OPTIONAL ACCESSORIES

Ideal for stand-alone applications or paired with SwirlFlo[®] and Soft Sides[®] fountains in:

- Educational facilities
- Healthcare facilities
- Sport and fitness centers
- Airports
- Office buildings
- Other commercial buildings

APPLICATIONS

2222 Camden Court
Oak Brook, IL 60523

Phone: 630 -572-3192
Web: Elkayusa.com



Third Party Certified to:


- UL399 and CAN/CSA 22.2 No. 120
- Lead-free compliance including NSF/ANSI 61 and CA AB1953

ROUGH-IN DIMENSIONS

Rated for Indoor Use Only

Models EZWSM8K & EZWSMDK

ELECTRICAL
 EZH2O Station equipped with electric cord and three-prong molded rubber plug for use with 15-amp minimum receptacle. In the cooling unit, a junction box for a (3) wire, 10-amp branch circuit is provided. Rated at 115 volt, 60 Hz, single phase.

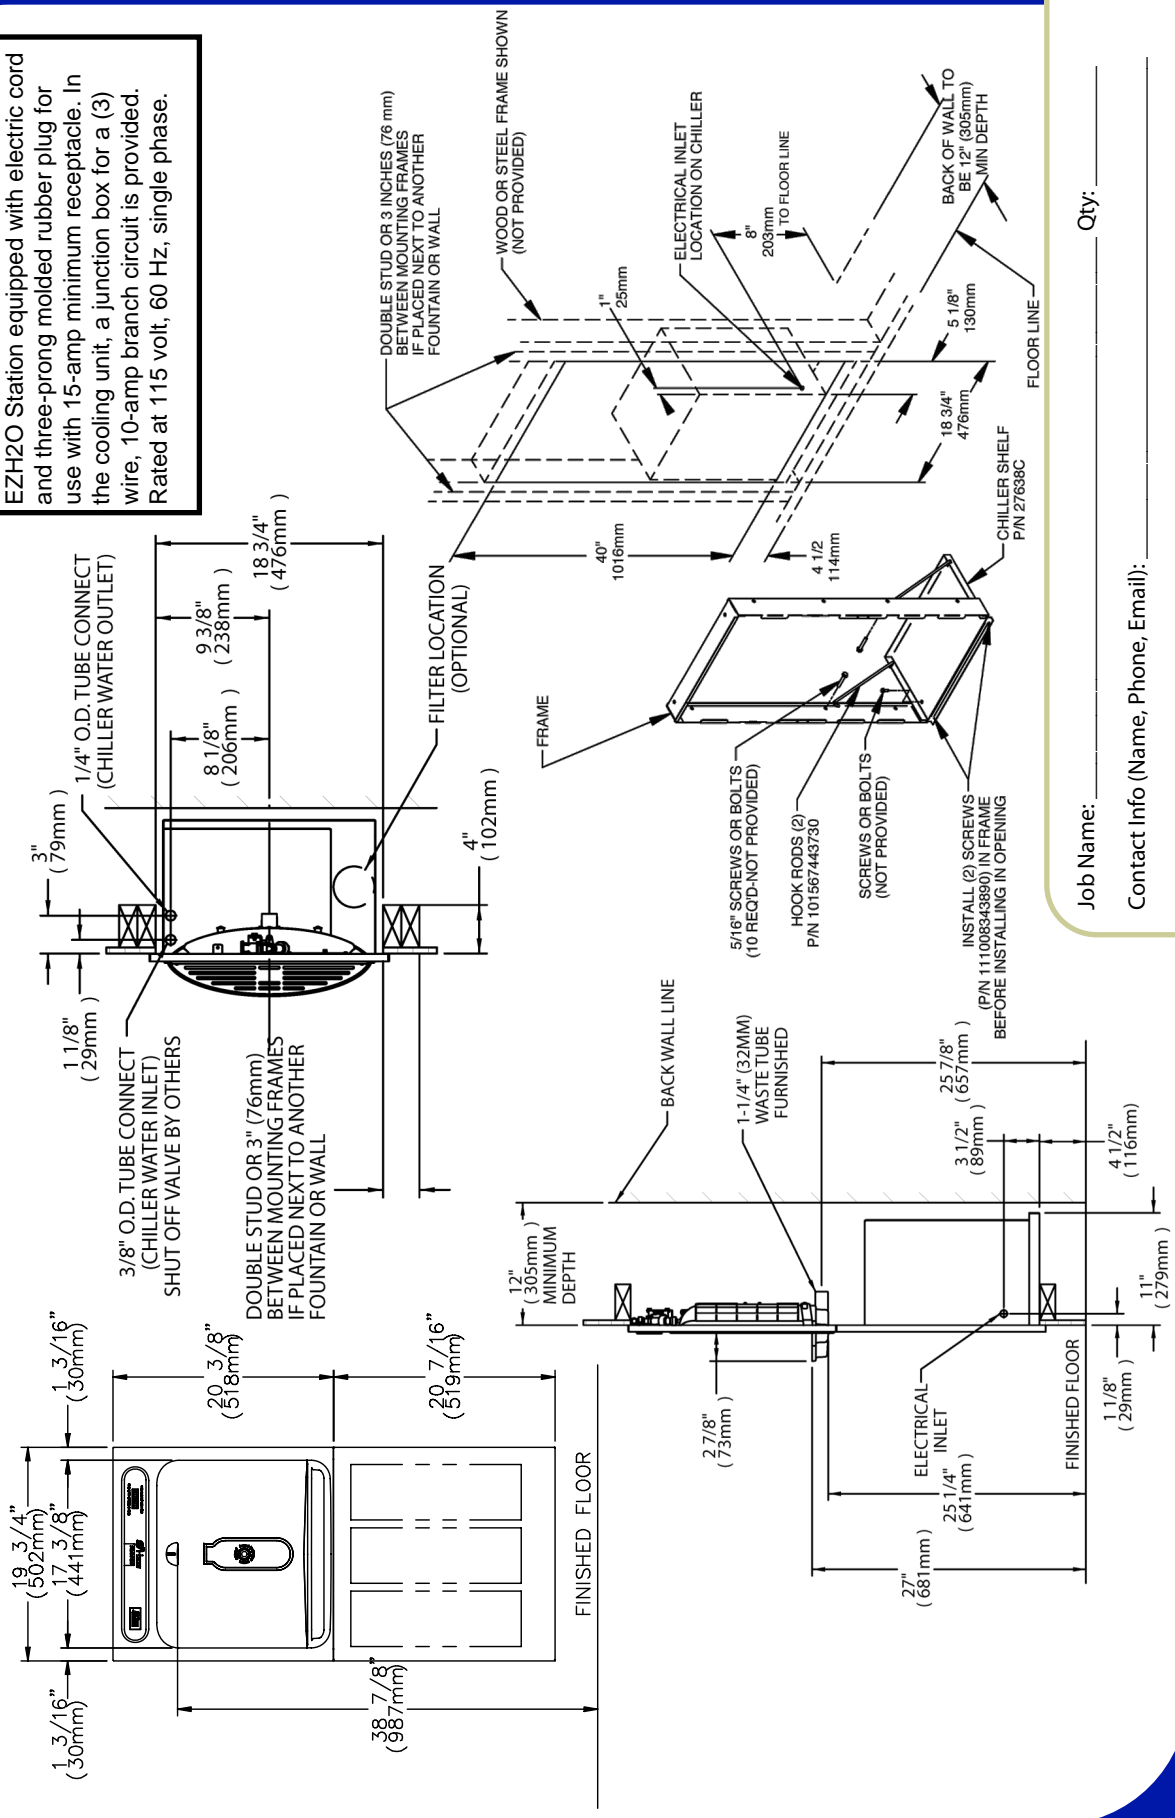

Job Name: _____ Qty: _____

Contact Info (Name, Phone, Email): _____

Approval for Manufacture — Signature and Date: _____

Comments: _____

Specifications and measurements are subject to change without notification.
 Please visit elkayusa.com for most current version.

2222 Camden Court
 Oak Brook, IL 60523
 Phone: 630 -572-3192
 Web: Elkayusa.com