

S19-210BF Pedestal-Mounted Eye/Face Wash Unit (Barrier-Free)

- Complies with American National Standard Z358.1-2004
- Galvanized Steel Pipe and Waste Tee with Floor Flange Protected with BradTect[®] Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty

Specifications

Barrier-Free Accessibility

Unit design saves space and fits easily into any work environment. Eye/face wash operates quickly by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the sprayhead assembly. Because of the placement of the eyewash bowl on the unit, wheelchair users are accommodated.

UPC and cUPC Approved

The emergency fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Standard Equipment

Eyewash Bowl

10" (254) diameter stainless steel.

Standard Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin, soft flow, eyewash heads and protective sprayhead covers. The integral flow control assures safe, steady flow under varying water supply conditions from 30-90 PSI.

Face Spray Ring

Chrome-plated circular spray ring provides supplemental face spray. Flow control assures adequate flow from eyewash nozzles and face spray ring from 30-90 PSI.

Valve

Chrome-plated brass 1/2" IPS stay-open ball valve. Hand operated by a large, highly visible safety yellow PVC push handle.

Pipe and Fittings

Galvanized steel and waste tee with floor flange protected with $\text{BradTect}^{\circledast}$ safety yellow coating.

Waste

1-1/4" drain fitting furnished.

Water Supply

1/2" IPS.

1/2 125.

Satisfies ANSI Z358.1-2004 tepid water requirements.

Recommended Option:

Navigator S19-2000 EFX8

Emergency Thermostatic Mixing Valve

NAVIGAT


Model Number	Description
□ S19-210BF	Pedestal-Mounted Eye/Face Wash Unit (Barrier Free)
□ S19-2000	Navigator EFX8 – Emergency Thermostatic Mixing Valve







Page 1 of 1 This information is subject to change without formal notice. 4/22/2009

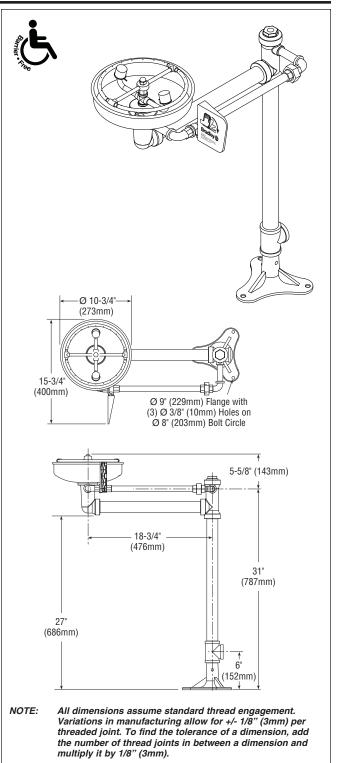

© 2009 Bradley Corporation P.O. Box 309, Menomonee Falls, WI 53052-0309 Phone: 800.BRADLEY(800.272.3539) Fax: 262.253.4161 bradleycorp.com