
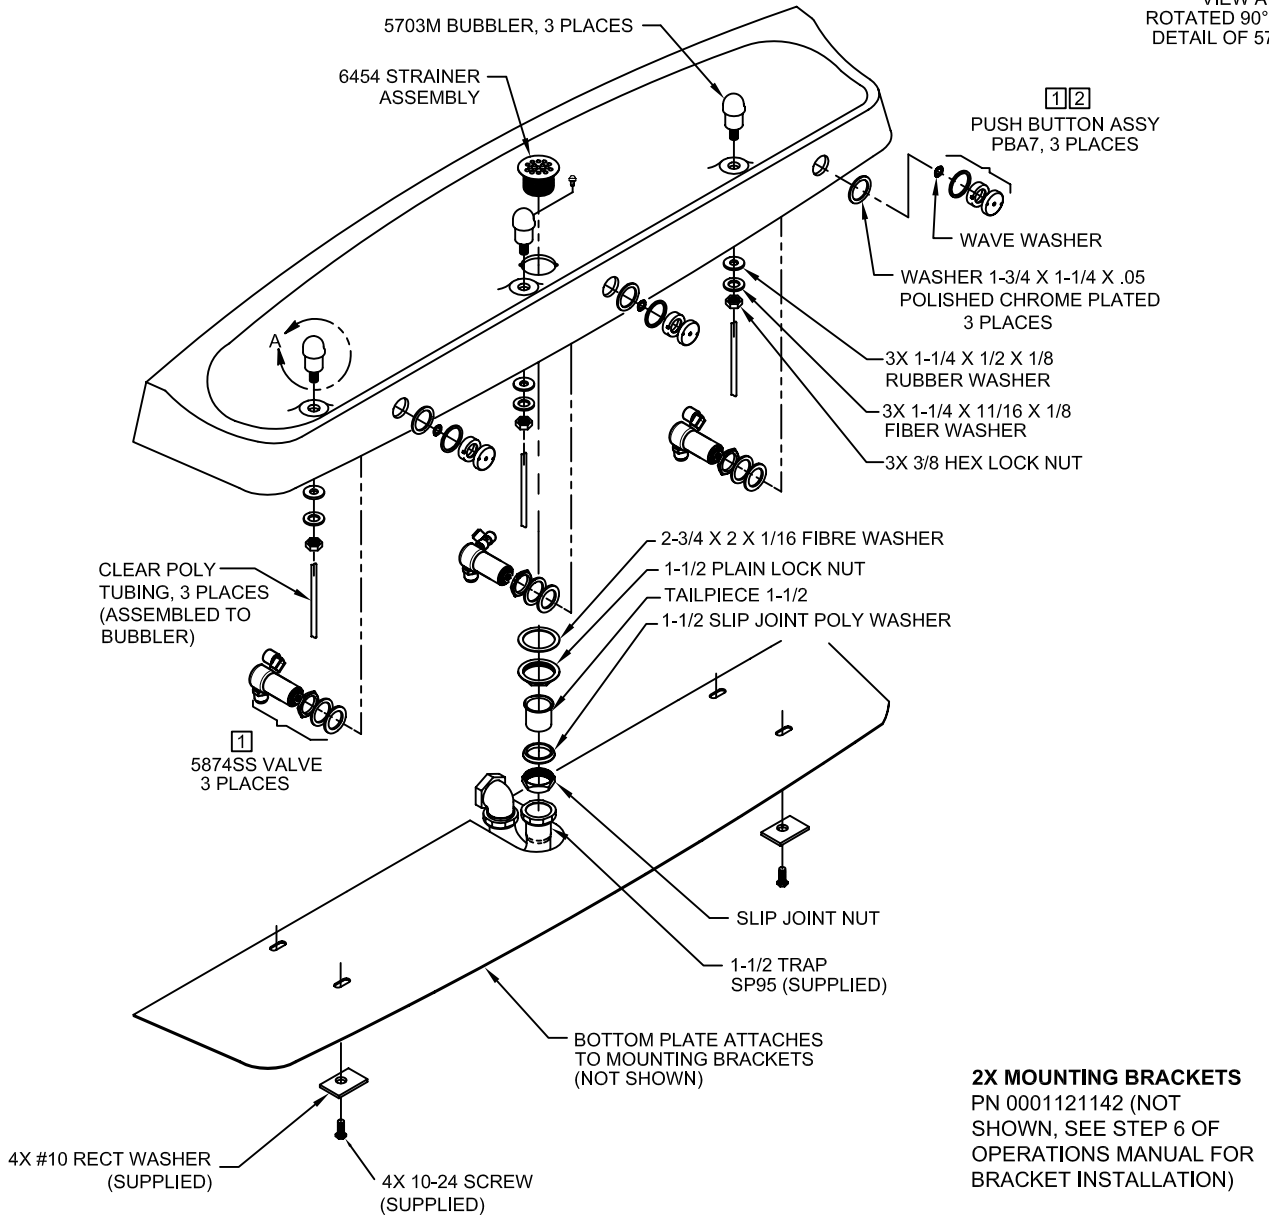


NOTES:

- 1 REFER TO 5874SS/VRK5874 OPERATION AND MAINTENANCE MANUAL FOR INSTALLATION INSTRUCTIONS.
- 2 MUST APPLY 1 DOT OF LOCTITE 222MS THREAD-LOCKER ON FEMALE THREADS OF PUSH BUTTON. SEE 5874SS OPERATION AND MAINTENANCE MANUAL (PAGE 5 OF 5) FOR PROPER APPLICATION PROCEDURE.
- 3. FOR TUBING ROUTING AND LENGTHS SEE SHEET 2 OF INSTALLATION DRAWING.

PARTS BREAKDOWN



WHEN ORDERING PARTS PLEASE SPECIFY YOUR MODEL NUMBER

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO: 4093 REVISED PER: HM DATE: 06/29/97 CHKD.:	MODEL(S) 1435 THREE BUBBLER FOUNTAIN
DRAWING: D. OLLOM APPROVED:	DATE: 06/29/97 DATE:	SCALE: 1:7 DRAWING TYPE: PARTS BREAKDOWN	DRAWING NO.: 12797C00 REV. 15 SHEET 1 OF 1