



RADII™ MODULAR FOUNTAIN

M140R

Suggested Specification

Model M140R shall include a vandal resistant button to manually activate the water flow. The fountain shall be designed to eliminate splashing and standing water. Bubbler shall have flexible guard and operate between 20 and 120 PSI. Drinking water coolers shall comply with ANSI A117.1-1992 and ADA frontal approach requirements. Listed by Underwriters' Laboratories to U.S. and Canadian standards. Shall comply with the Safe Drinking Water Act and Lead Contamination Control Act. Shall comply with ANSI/NSF 61.

RADII™ Modular Fountain meets the needs of the physically challenged and the able-bodied.

Model

M140R A light press of the push pad activates the flow of water.

Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Vandal Resistant Flexible bubbler
- > Bottom panel includes vandal resistant screws
- > Waterways are Lead-Free in Materials & Construction
- > Brushed Stainless Steel Finish
- > Heavy duty galvanized steel wall mounting frame
- > Limited 1-Year Warranty

Finishes

- > Standard Finish: Stainless Steel
- > Optional Finish (at additional cost): Regency Bronze

Installation

- > Prior to roughing-in, consult local, state and federal codes for proper mounting height.
- > Wall mounting frame is furnished for easy installation

Net Weight

- > Net weight approximately 39 lbs.

Options (at additional cost)

- One Piece chrome plated brass bubbler (036700-001)

Limited 1-Year Warranty (Continental limits of the United States and Canada): One year from date of installation on parts only. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Export Warranty: One year on component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Water coolers are classified by Underwriters' Laboratories Inc. in accordance with ANS/NSF 61. Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

ADA Compliant when installed in an alcove or with right and left wing walls.



Oasis International Product
Certified by NSF to
NSF/ANSI Standard 61, G


OASIS® RADII™ MODULAR DRINKING FOUNTAIN MODEL M140R

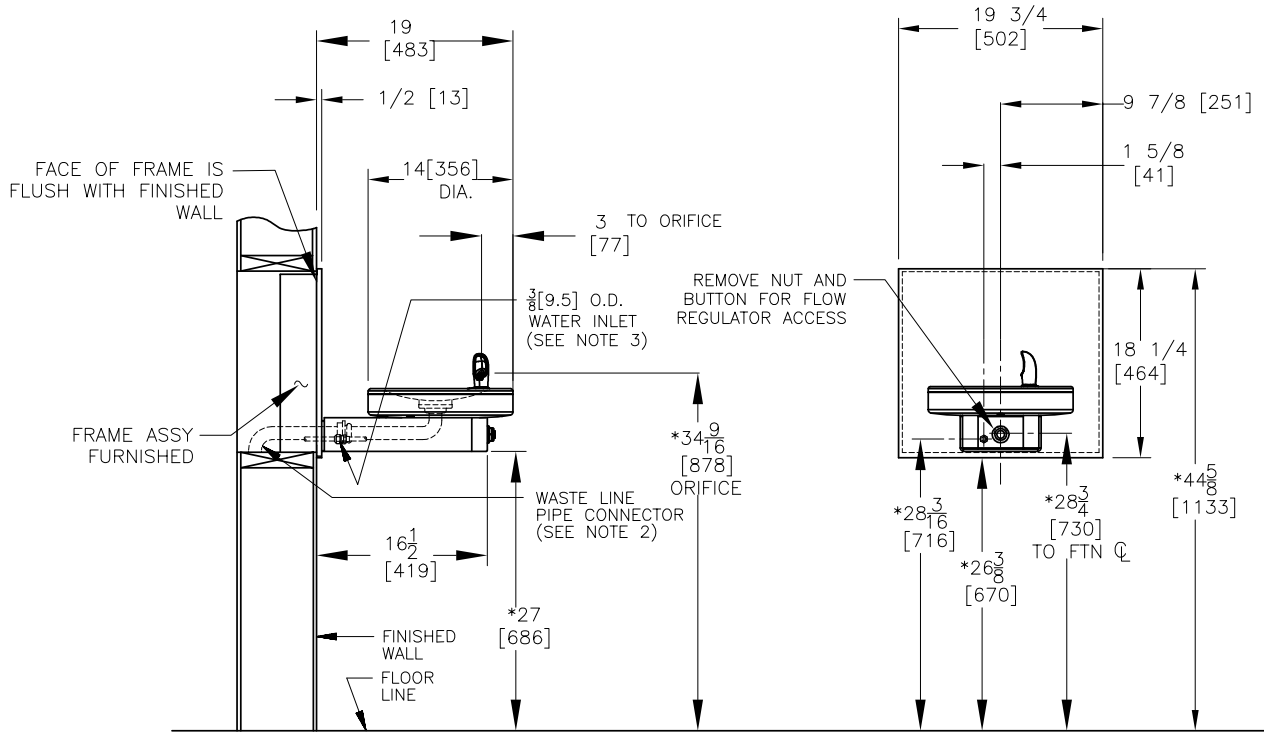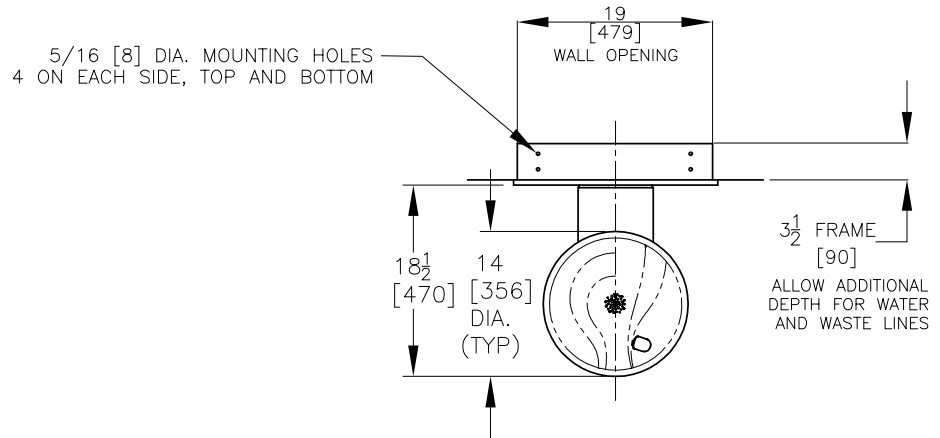

NOTES:

- *1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED WITH UNIT. 2[51] PROJECTION OF 1 1/2[38] OR 1 1/4[32] PIPE STUB FOR 1 1/4(32) O.D. WASTE LINE REQUIRED.
3. 2[51] PROJECTION OF 3/8[9.5] O.D. WATER SUPPLY TUBE REQUIRED.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

THIRD ANGLE PROJECTION



ROUGHING-IN
AND
DIMENSIONAL DRAWING