


25-400-B30-V Temptrol II™ Tub and Shower System with Hand Spray


Temptrol II (2000 Series) Pressure Balancing mixing valve with built-in choke and adjustable stop screw to limit handle turn. Tub spout, wall/hand shower with in-line vacuum breaker, flexible 5' metal hose, wall connection and flange. 30" slide bar for hand shower mounting.

Modifications:

- Suffix BRS:** Radiance® polished brass finish
- Suffix PCB:** Polished chrome and Radiance® polished brass finish
- Suffix STN:** Radiance® satin finish
- Suffix X:** Integral service stops—allows water shut-off at valve for service
- Suffix LP:** Loop style lever handle
- Suffix R:** Vinyl hose in place of standard metal hose
- Suffix SS:** Slip-on type tub spout in place of standard tub spout

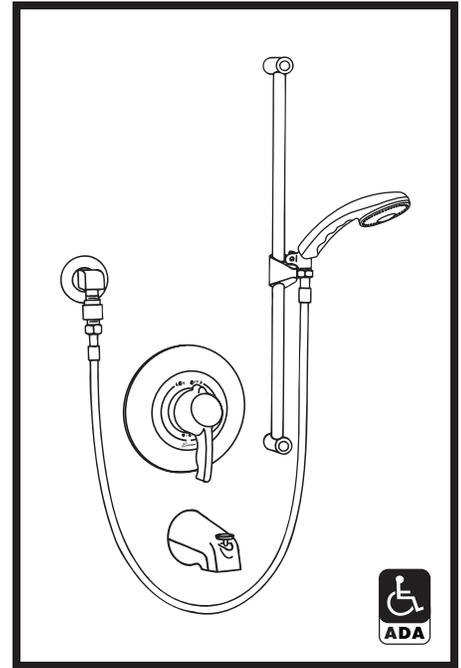

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

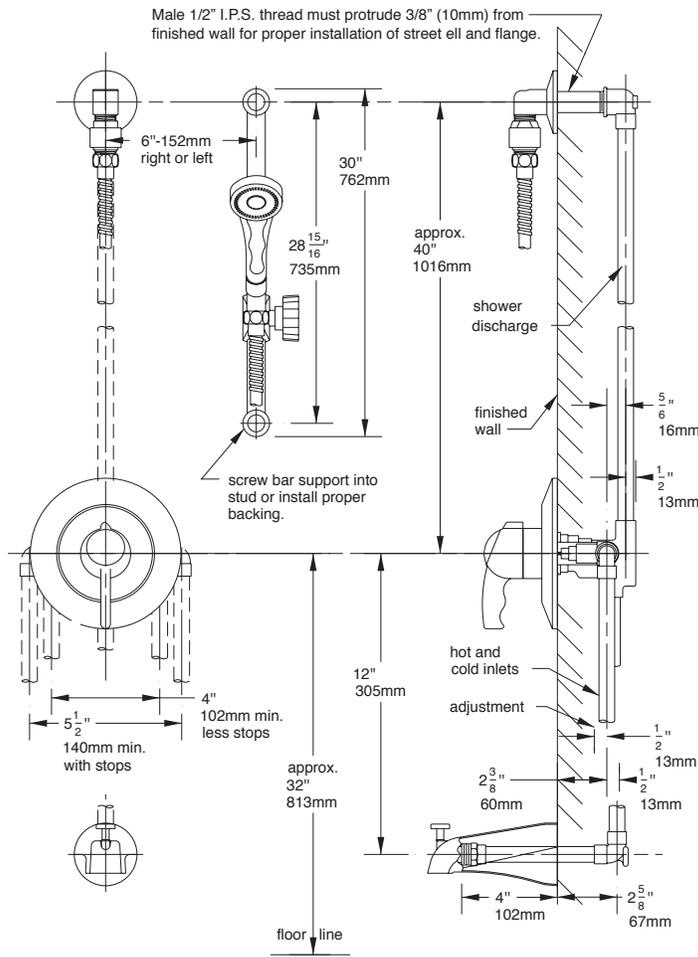

Job/Location

.....
.....

Engineer

.....
.....

Contractor

.....
.....

 This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. Dimensions are for ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
(800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
Website: www.symmons.com ■ Email: customerservice@symmons.com