


Tub and Shower System S-4202 **Specification Submittal**







Feature Highlights

- Symmons tub and shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Secondary integral diverter/volume control handle
- Showerhead #422SH, arm and flange
- Standard flow rate is 2.5 gpm (9.5 L/min)
- Tub spout
- Polished chrome finish

Model Numbers

S-4202	Tub and Shower System with Symmons Temptrol® pressure balancing mixing valve p/n S-4002-BODY
S-4202-TRM	Trim only, valve and diverter must be ordered separately
S-4002-BODY	Symmons Temptrol® pressure balancing mixing valve without trim
S-4002-X-BODY	Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations

Options / Modifications


Append appropriate -suffix to model number.

- □ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ¬X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n S-4202-X-BODY. (Option only applies when ordering model S-4202)
- -L/HD Showerhead not included
 Includes showerhead arm and flange only
- □ -VP Vandal resistant
- ☐ -2.0 2.0 (7.6 L/min) flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) flow rate restrictor

Finish Options / Modifications

Append appropriate -suffix to model number.

- ☐ -STN Satin nickel
- ☐ -ORB Oil Rubbed Bronze
 - Polished chrome (standard finish)

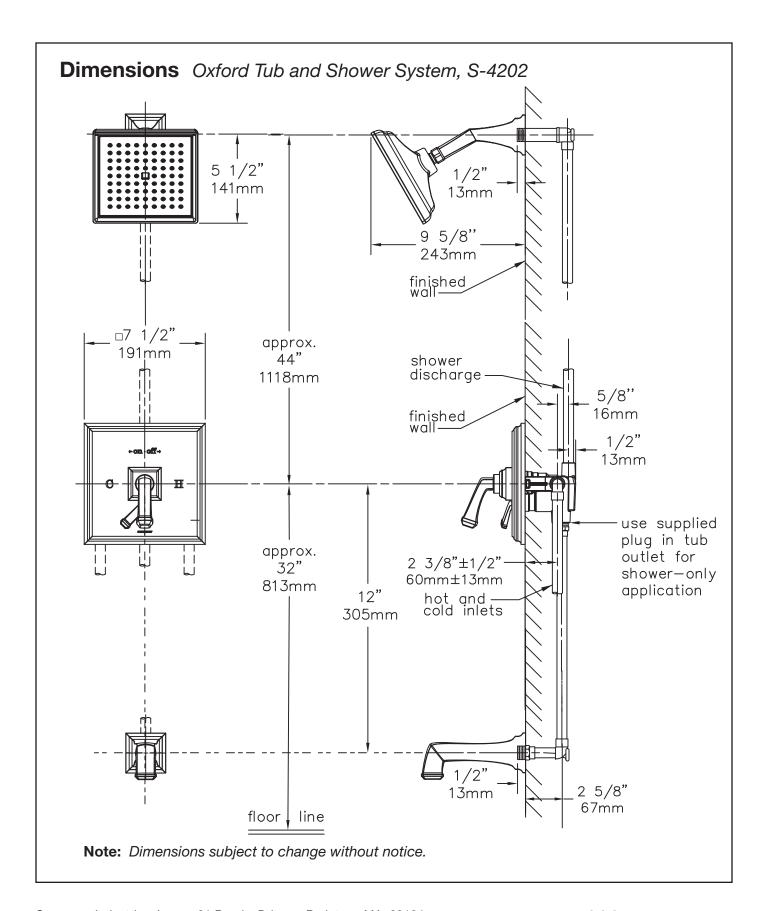

Symmons Industries, Inc. = 31 Brooks Drive = Braintree, MA 02184 (800) 796-6667, (781) 848-2250 = Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com = Email: customerservice@symmons.com

