

# ULTRA-SENSE®

## Sensor Activated Lavatory Faucet

- ☐ **S-6080-ACM-G:** With grid strainer drain assembly
- ☐ **S-6080-ACM:** Faucet only

**Ultra-Sense** sensor-activated lavatory faucet with infrared Position Sensitive Detection (PSD) system. Faucet features 4" center deck plate and temperature limit stop to adjust outlet temperature, 1.5 gpm (5.7 L/min) low profile, vandal-resistant aerator. 10 second factory-set cycle time with automatic shut-off feature, 10' (3048mm) output cord to be used with a multi-unit power supply (see note below), in-line check/strainers. Electronic components are sealed and housed above deck in a cast brass body for maximum vandal resistance.

**Note: Model S-6240 multi-unit power supply must be specified and purchased separately. The multi-unit power supply can operate up to eight (8) ACM faucets.**


**Faucet can be installed in one of three possible supply configurations:**

- ① Hot and cold supply with lever handle temperature adjustment (factory standard)
- ② Hot and cold supply with pre-set tempered water (field adjusted)
- ③ Single supply for cold or premixed tempered water (field adjusted)


### Modifications:

#### Add:

- ☐ **Suffix DP:** 8" adapter plate
- ☐ **Suffix FR:** 0.5 gpm flow restrictor
- ☐ **Suffix NA:** Non-aerated laminar flow spray outlet
- ☐ **Suffix OFG:** Offset grid strainer drain assembly in place of standard grid drain
- ☐ **Suffix SM:** Single hole mounting
- ☐ **Suffix LST:** 18" copper supply tubes in lieu of flexible hoses
- ☐ **Suffix 20:** 20' (6096mm) output cord in place of standard 10' (3048mm) cord

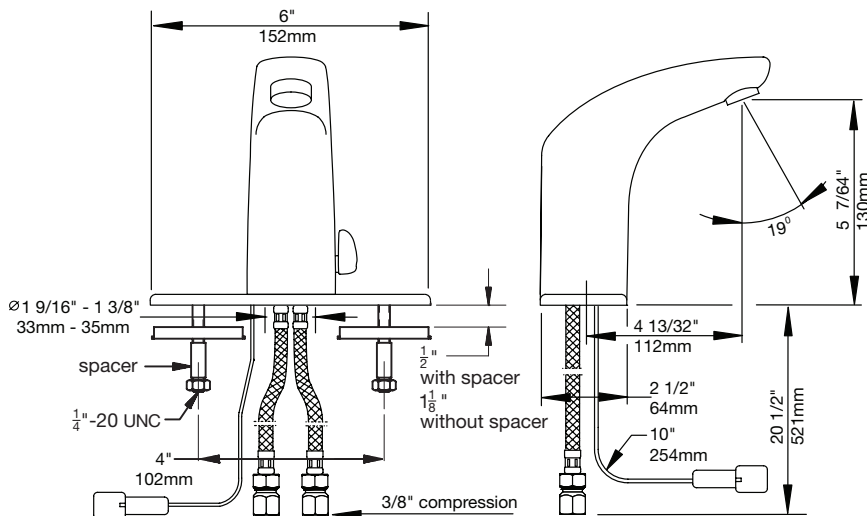

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849  
 Website: [www.symmons.com](http://www.symmons.com) ■ Email: [customerservice@symmons.com](mailto:customerservice@symmons.com)

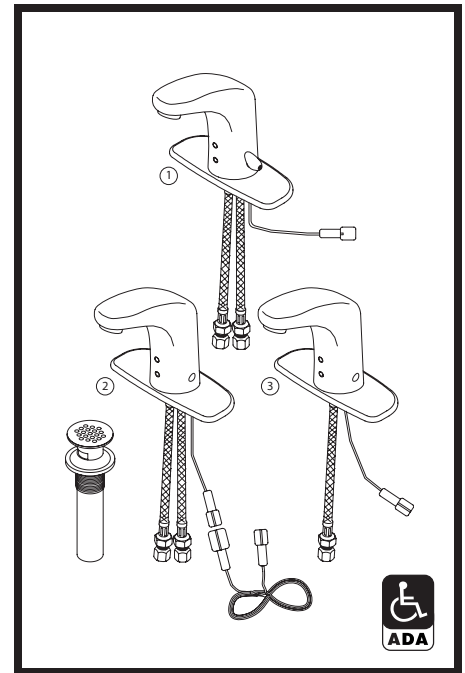

**SYMMONS PRODUCTS MEET  
 ANSI A112.18.1M, EPA '92  
 AND ALL KNOWN FLOW RATE  
 REQUIREMENTS.  
 Metering Faucets  
 0.25 gallons per cycle (1.0 L/cycle)**

### Job/Location

.....  
 .....

### Engineer

.....  
 .....

### Contractor

.....  
 .....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

**SYMMONS®**  
 the smart choice™