


Location:

SYMMONS® Temptrol™

Shower Valve System S-86-1 Specification Submittal

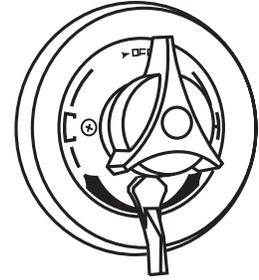

Feature Highlights

- Symmons shower valve system with Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Separate lever handle to control volume control
- Polished chrome finish

Model Numbers

- S-86-1..... Shower valve system with Symmons Temptrol® pressure balancing mixing valve
- S-86-1-TRM..... Trim only, valve must be ordered separately

Finish Options / Modifications

Append appropriate -suffix to model number.

- Polished chrome (standard finish)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Complies with ASSE 1016

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Options / Modifications

Append appropriate -suffix to model number.

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- X Integral Service Stops
Symmons Temptrol® pressure balancing mixing valve includes service stops to allow water shut-off for service,
- CHKS Integral Check Stops.
Temptrol valve includes check stops.
Note: Only available with integral service stop option (-X)
(Used in installations where a positive shut-off device is used downstream of mixing valve.)
- REV Reverse core in valve for back-to-back installations. HOT on the right and COLD on the left
- B Chrome plated brass escutcheon


Handle Options / Modifications

Append appropriate -suffix to model number.



- L Single blade style lever handle
- LR lever handle
- LP Loop style lever handle

Dimensions *Temptrol Shower Valve System, S-86-1*

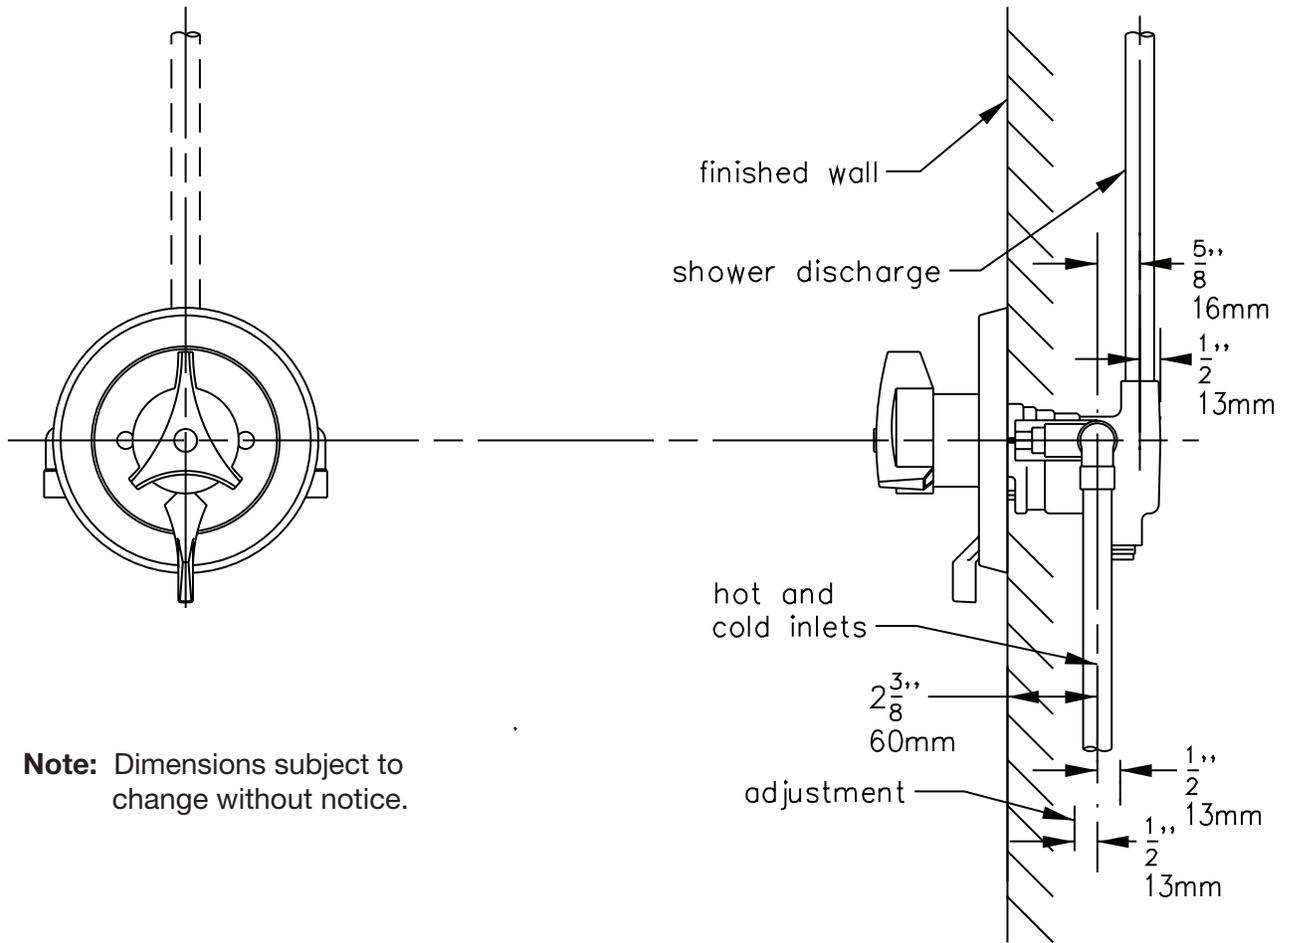

Note: Dimensions subject to change without notice.