
WIDESPREAD Z831G4

TAG

Engineering Specifications: Zurn AquaSpec® Z831G4

Polished chrome-plated adjustable 6" [152mm] to 20" [508mm] widespread with an 8"[203mm] cast brass swing spout and quarter turn ceramic disc cartridges. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 4" [102mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers. Widespread accommodates installations up to 1-1/8" [29mm] thick.

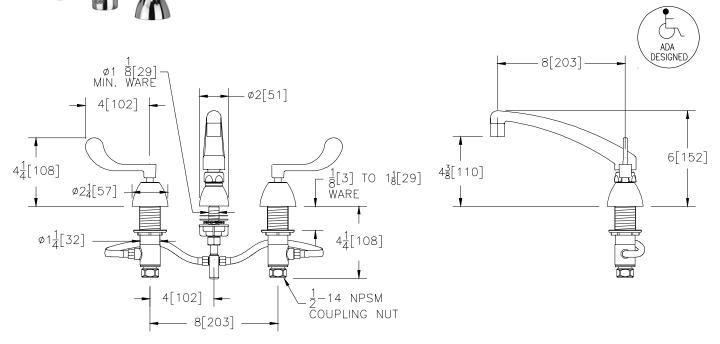

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix	Description
CWO	Cold Water Only
-G	1-1/4" [32mm] Grid Strainer Drain
HCT	Hot/Cold Text Indexes
HS	Hose and Spray
P	1-1/4" [32mm] Pop-up Drain
PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet
4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
5F	2.0 GPM [7.6 L] Female Spray Outlet
7F	1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet
16F	1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet
17F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator
18F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
19F	1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
20F	1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Anti-Microbial Female Laminar Flow Outlet
21F	1.0 GPM [3.8L] Female Laminar Flow Outlet
22F	1.0 GPM [3.8L] Vandal-Resistant Female Laminar Flow Outlet

ZURN INDUSTRIES, LLC COMMERCIAL BRASS OPERATION 2640 SOUTH WORK STREET FALCONER NY 14733 Phone: 1-716-665-1132 Fax: 1-716-665-1135 World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED 3544 Nashua Drive Mississauga, Ontario L4V1L2 Phone: 905/405-8272 Fax: 905/405-1292