


# **Z6920-GEN**

### **Lavatory Faucet with Hydroelectric Generator**



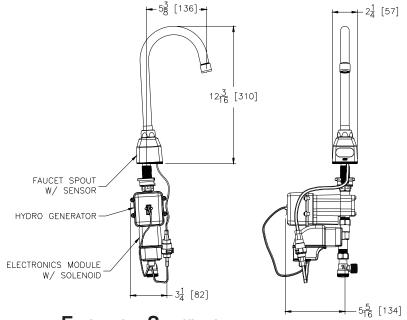

## Flow Control Options

- □ -J 1.5 gpm/5.7 Lpm Vandal-Resistant Laminar Flow
- □ -K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- □ -L 1.0 gpm/3.8 Lpm Vandal-Resistant Aerator

#### Accessories

□-ADM	Above Deck Mixer *
I I -ADIVI	ADOVE DECK MIXEL

- □-ADM-1 Above Deck Mixer w/4" Cover Plate \*
  □-ADM-2 Above Deck Mixer w/8" Cover Plate \*
- □ -CP4 Cover Plate 4"[102] Centers
  □ -CP8 Cover Plate 8"[203] Centers
  □ -GA 3-1/2" [89mm] Goosneck Spout
  □ -GC 8" [203mm] Goosneck Spout
- □ -H4 Wrist Blade Handle for ADM \*
- □ -MT Mixing Tee \*
- □ -MV Temperature Mixing Valve□ -SH Supply Hoses for Mixing Valve
- □ -SO Rosette Spray Aerator
- □ -TMV Thermostatic Mixing Valve for Multiple

**Faucets** 

□-TMV-1 Thermostatic Mixing Valve for Single

Faucets

□- Other

ZURN INDUSTRIES, LLC. ◆ COMMERCIAL BRASS OPERATION 5900 ELWIN BUCHANAN DRIVE ◆ SANFORD NC 27330

Phone: 1-800-997-3876 Fax: 919-775-3541

www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED

3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2

Phone: 905-405-8272 Fax: 905-405-1292

## Engineering Specification

ADA compliant, chrome plated sensor faucet for retrofit and new construction.

- Flow Rate
  - 1.5 gpm Vandal Resistant Aerator (0.25 gal per 10 sec. cycle)
- Occupant Detection

Infrared convergence-type proximity sensor Thirty Second Time out feature

Power Supply

Self Sustaining Hydroelectric Generator

Approximately 10 years (1.5 gpm)/5 years (1.0 gpm)

Spout module

**Chrome Plated Cast Brass** 

> Also Includes

In-line filter

Inlet for a 1/2"[13] ball riser

Single supply hose

\* Option not available for -XL faucets

Architectural/Engin	eering Approval

The information contained in this document is subject to change without notice.

Please contact Zurn for most up to date information.

Date: 1/17/11