

TEMP-GARD TUB and SHOWER UNIT


Z7221-SS-LH

TAG



ENGINEERING SPECIFICATIONS: ZURN Z7221-SS-LH

Single handle pressure balancing mixing tub and shower unit with diverter/volume control, with single bronze stem, stainless steel balancing piston integral with stem assembly, metal lever handle, integral service stops, and brass adjustment limit stop screw in cap. Complete with double seal packing, adjustable brass packing nut, and removable brass seats; all exposed trim with polished nickel chrome plated surface. Valve supplied with standard shower head, arm, flange and tub spout. The valve hot and cold inlets and shower outlet are 1/2" female copper sweat, the tub outlet is 1/2" NPT connections.

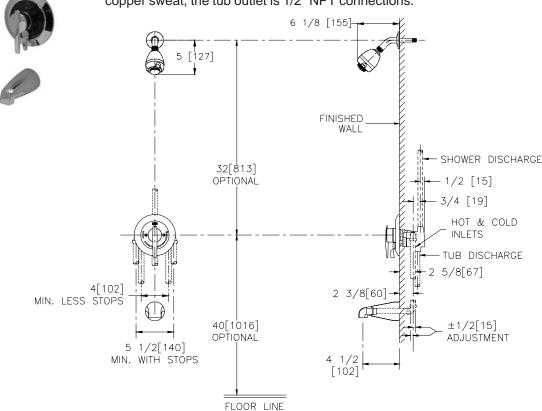

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONS (Check/specify appropriate options) *Use with Z7000 prefix*

Suffix	Description	
BC	Back Connections (1/2") (For 90° Instructions),	-
	Shipped as Loose Adaptors, to be Installed in the Field	١
CC	Conversion Cover Plate	/
DT	Dial Thermometer	/
IP	1/2" Female Threaded Connection, Shipped as	Ī
	Loose Adaptors, to be Installed in the Field	f
MT	Metal Cover, Escutcheon & Stem Handle	
RC	Reverse Connections (For Back-to-Back Installations)	
SC	Pair of Dual Spring Check Valves	
STH	ABS Chrome Plated Handle with Screw and Button	
T1-SJ	Standard Tub Spout 1/2" Slip Joint Connection	
T3	Chrome Plated Cast Brass Tub Spout	
-WF	Wall Mounting Flange For Fiberglass or Panel Wall Installation	

STANDARDS

Tested to meet the following standards for valves and plumbing fittings: ASSE Standard No. 1016 ASME A112.18.1/ CSA B125.1

Meets or Exceeds ANSI A117.1M standard for physically handicapped







ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733
Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292