

AquaSense[®]

TAG

AquaSense Back Mount Sensor Faucet

	Suffix	Suffix Options (Check/Specify Appropriate Options)	
		-F	0.5 GPM Vandal Resistant Aerator
		-GA	3-1/2" Gooseneck Spout
		-GC	8" Gooseneck Spout
		-GEN	Hydro Generator
		-IA3	Inlet Adaptor (3/8"[10] compression)
		-J	1.5 GPM Laminar Flow Control
		-K	1.0 GPM Laminar Flow Control
		-L	1.0 GPM Vandal Resistant Aerator
		-MJ	Mini Junction Box
		-MT	MixingTee
		-MV	Temperature Mixing Valve
ADA		-SH	Supply Hoses for Mixing Valve
		-SSH	Single Supply Hose
		-SO	Rosette Spray Aerator
DESIGNED		-TMV	Thermostatic Mixing Valve for Multiple Faucets
		-TMV-1	Thermostatic Mixing Valve for Single Faucets
			Other

Z6922 AquaSense Back Mount Battery Powered Faucet

ENGINEERING SPECIFICATION: The Z6922 Back Mount sensor faucet is a battery powered sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence type proximity sensor into the base of the gooseneck faucet. The faucet is furnished complete with sensor module, spout module and in-line filter, 4 "AA" batteries, a 1.5 GPM vandal resistant aerator and an inlet for a 1/2"[13] ball riser supply hose. Sensor range is factory set for optimum performance.

Z6922-ACA AquaSense Back Mount Plug-In Powered Faucet


ENGINEERING SPECIFICATION: The Z6922-ACA Back Mount sensor faucet is a plug-in powered electronic sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence type proximity sensor into the base of the gooseneck faucet. The faucet is furnished complete with sensor module, spout module, in-line filter, a 1.5 GPM vandal resistant aerator, 6 VDC plug-in power converter and an inlet for a 1/2"[13] ball riser or supply hose. Also included are 4 'AA' batteries that provide battery backup power to the faucet during power outages. Sensor range is factory set for optimum performance.

Z6922-CWB AquaSense Back Mount Hardwire Powered Faucet

ENGINEERING SPECIFICATION: The Z6922-CWB Back Mount sensor faucet is a hardwired electronic sensor faucet for retrofit and new construction. The faucet incorporates an infrared convergence type proximity sensor into the base of the gooseneck faucet. The faucet is furnished complete with sensor module, spout module, in-line filter, a 1.5 GPM vandal resistant aerator, connecting wire to power converter and an inlet for a 1/2"[13] ball riser or supply hose. Also included are 4 'AA' batteries that provide battery backup power to the faucet during power outages. Sensor range is factory set for optimum performance.

NOTE: For Hardwire applications furnish P6000-HW6 power converter. The P6000-HW6 will power up to 8 sensor faucets. Order P6000-HW6 power converter seperately.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292

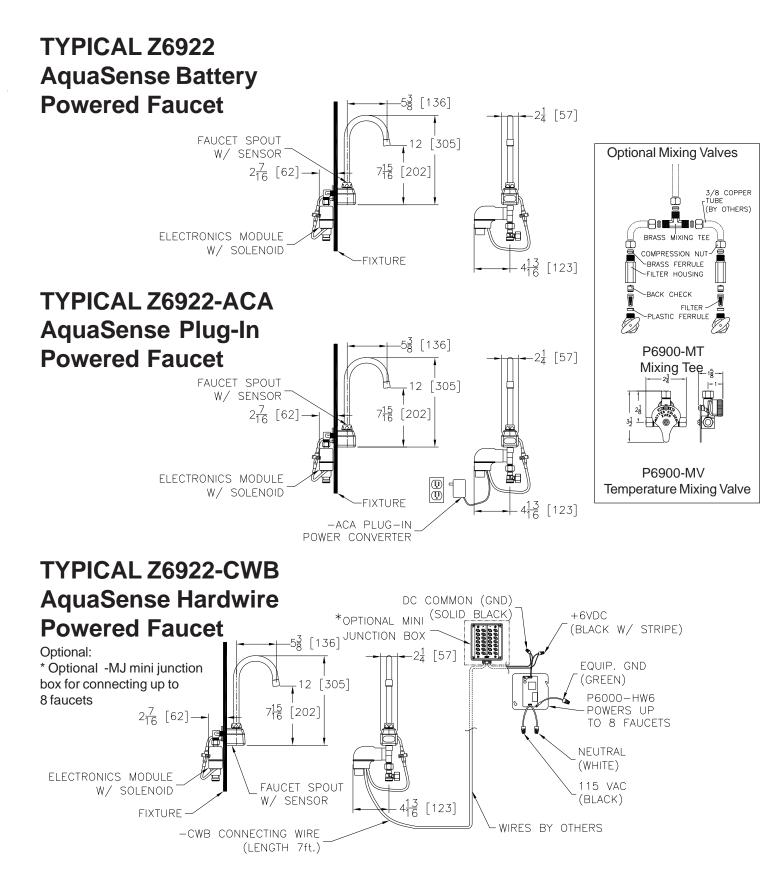

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-PC6 PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292