SPEAKMAN®


SE-575-DP-237

ADA COMPLIANT SWING ACTIVATED EYEWASH

DESCRIPTION

SE-575-DP-237 is a combination recessed, wall mounted swing down eyewash with an integral drain pan and a wall activated deluge shower. The eyewash features a stainless steel cabinet and activates automatically as the spray arms are pulled downwards. The extended arms provide for easy accessibility for persons with physical disabilities and a lockable access panel provides for easy serviceability from the front of the unit. The shower features a recessed chrome-plated shower head, stainless steel access panel and activates when the handle is pulled



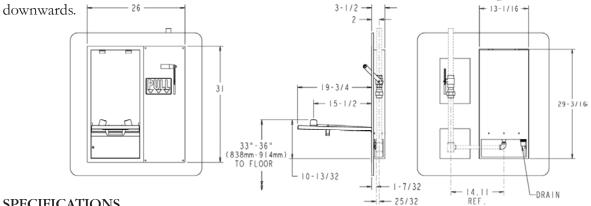

SPECIFICATIONS

EYEWASH

Spray Heads: (2) Brass, chrome-plated

Valve: Brass, chrome-plated Activation: Swing activated. Inlet: 1/2" NPT female

Cabinet: 304 Stainless Steel with satin finish

Door (Drain Pan): 304 Stainless Steel with satin finish

Eyewash Flow: 3.9 gpm @ 30 psi Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

☐ FLW	Flow switch
\square ILS	In-line strainer

 \square SSH Stainless steel showerhead

SHOWER

Showerhead: 10" Flush mounted, polished

chrome plated.

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT, stay-open valve.

Access Panel: Type 304 Stainless Steel. Activator: Wall mounted stainless steel lever

with black plastic rotating handle. Peformance: 20 gpm @ 20 psi

1 clot marice. 20 gpin (a) 20 psi	
Job Name	
Location	
Architect/Engineer	
Sales Representative	
Wholesaler	
Date Model #	