SPEAKMAN® SE-690-ADA


COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

The SE-690-ADA Safe-T-Zone[®] features the SE-490 eye/face wash, modified with an extended bowl, with dual spray outlets, flip-top dust covers and stainless steel bowl combined on a powder coated galvanized steel stanchion with an impeller action deluge showerhead which is activated by an extended high visibility yellow pull rod. Unit designed for ADA accessibility.

SPECIFICATIONS

Showerhead: 8" Cycolac[®] yellow plastic Flow Control: Internal 20 gpm regulator Valve: 1" NPT female brass, chrome-plated. Full flow stay open ball valve Activator: Powder coated yellow, extended aluminum triangular pull rod Stanchion: 11/4" IPS galvanized steel piping with brass fittings Inlet & Waste: 1¹/₄" NPT female Finish: DuraJadeTM powder coated green finish Performance: 20 gpm @ 20 psi EYE/FACE WASH: SE-490 Bowl: 300 series stainless steel. Spray Heads: (2) yellow ABS plastic spray outlets with flip-top dust caps Valve: 1/2" NPT female brass, chrome-plated full flow stay open ball valve Activator: Stainless steel push handle Performance: 3.8 gpm @ 30 psi Compliance: ANSI Z358.1 Universal Emergency Sign Included **OPTIONS** BH Brass showerhead **G** FLW Flow switch **F**PV Freeze protection valve **H**FO Hand/Foot operation **H** HS Hand-held spray **SCV** Self-closing shower valve **SPR** Stainless steel pull rod □ SPV Scald protection valve **SSBV** Stainless steel ball valve **SSH** Stainless steel showerhead \Box TS Top supply

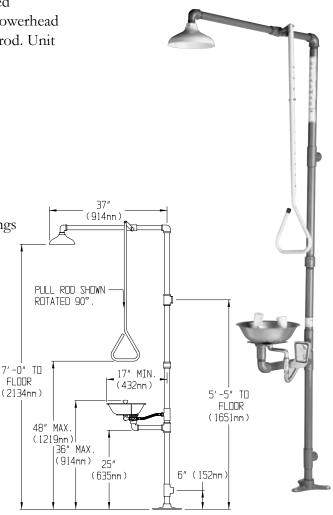

Job Name	
Location	
Architect/Engineer	
Sales Representative	
Wholesaler	
Date Model #	