

# Eye/Face Wash Unit w/ Hinged Dust Cover and Wall Bracket

**Model S19-220DCFW**

**Model S19-220DCSS**

- Complies with American National Standard Z358.1-2004
- Galvanized Steel Protected with BRADTECT™ Safety Yellow Coating or All Stainless Steel
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty



## Specifications

Unit design saves space and fits easily into any work environment. Eye/face wash operates quickly by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the sprayhead assembly.

### UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

## Construction

Eyewash bowl, hinged dust cover and push handle are stainless steel. Galvanized steel piping and wall mounting bracket are additionally protected with BRADTECT™ safety yellow coating. Chrome plated tailpiece provided. S19-DCSS is all stainless steel except for sprayheads.

## Standard Equipment

### Eyewash Bowl

10" (254mm) diameter stainless steel.

### Eye/Face Wash Spray Heads

Twin ABS plastic perforated disc eye/face wash heads with protective pop-up spray-head covers. Safe, steady water flow under varying water supply conditions is assured by a flow control for 30-90 PSI.

### Valve

Chrome-plated brass 1/2" IPS stay-open ball valve. Hand operated by a large, highly visible stainless steel push handle. S19-220DCSS is all stainless steel.

### Hinged Dust Cover

Stainless steel cover keeps contaminants, dust and debris from eye washing area.

### Pipe and Fittings

1/2" galvanized steel protected with BRADTECT™ safety yellow coating. S19-220DCSS is all stainless steel.

### Wall Bracket

Heavy-gauge sand cast aluminum protected with BRADTECT™ safety yellow coating. Three clearance holes for wall mounting bracket; bolts by others. S19-220DCSS is all stainless steel.

### Waste

1-1/4" drain fitting and tailpiece furnished.

### Water Supply

1/2" IPS.

Document No. 4295


This information is subject to change without formal notice.  
© 2006 Bradley Corporation  
10-11-2006 (2 Pages Total)

EF4295.1

### Recommended Option:

Navigator S19-2000 EFX8  
Emergency Thermostatic Mixing Valve

**NAVIGATOR**



Satisfies ANSI Z358.1-2004  
tepid water requirements.

**Bradley** 

P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone 1-800-BRADLEY FAX 262-251-5817  
Web Site: <http://www.bradleycorp.com>






**SEI** CERTIFIED  
MODEL  
Z358.1-2004

# Eye/Face Wash Unit w/ Hinged Dust Cover and Wall Bracket

Model S19-220DCFW

Model S19-220DCSS

| MODEL                                |  |
|--------------------------------------|--|
| Model No.                            | Description  |
| <input type="checkbox"/> S19-220DCFW | Eye/Face Wash Unit w/ Hinged Dust Cover and Wall Bracket   |
| <input type="checkbox"/> S19-220DCSS | Eye/Face Wash Unit w/ Hinged Dust Cover and Wall Bracket – All stainless steel except sprayheads |
| <input type="checkbox"/> S19-2000    | Navigator EFX8 – Emergency Thermostatic Mixing Valve   |

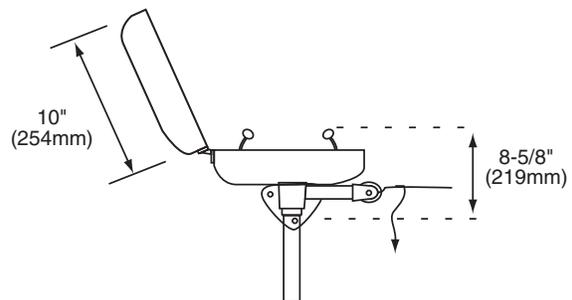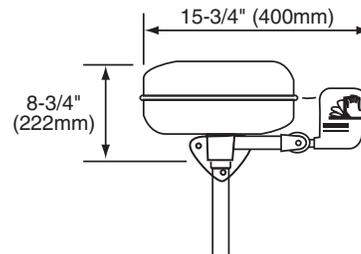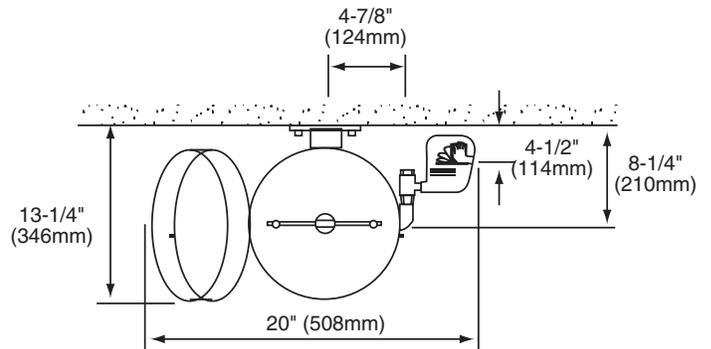

Document No. 4295

This information is subject to change without formal notice.  
© 2006 Bradley Corporation  
10-11-2006 (2 Pages Total)

EF4295.2



P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone 1-800-BRADLEY FAX 262-251-5817  
Web Site: <http://www.bradleycorp.com>