

- Complies with American National Standard Z358.1-2004
- Wall-Mounted Unit
- Galvanized Steel Protected with BRADTECT™ Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending



## Specifications

Drench Shower and Eyewash Unit is made specifically for areas subject to freezing. This unit saves space and fits easily into any work environment where outdoor plumbed water source is not available. Shower and eyewash valves operate quickly by a large, highly visible push handle. Shower provides a superior washdown with a more even spray pattern. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly. NOTE: The ANSI Z358.1 standard requires an uninterrupted supply of flushing fluid at a minimum 30 PSI flowing pressure.


### cUPC Approved:

S19-310TW is certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

## Standard Equipment

### SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic. SpinTec drench showerhead features integral 23 GPM flow control, conserving water and helping to accurately size your tepid water system.

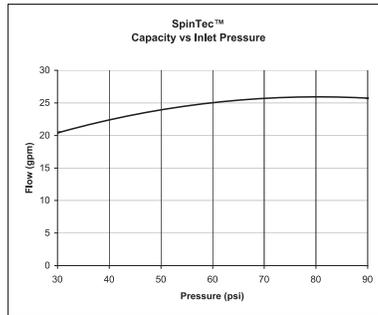

### Eyewash Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin soft-flow eyewash heads and protective sprayhead covers, operated by a large, highly visible stainless steel push handle. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly. NOTE: The ANSI Z358.1 standard requires an uninterrupted supply of flushing fluid at a minimum 30 PSI flowing pressure.

### Frost-Proof Shower and Eyewash Valve (Independent Operation)

Shower has 1" NPT stay-open valve. Eyewash has 1/2" NPT stay-open valve. Hand operated by a large, highly visible stainless steel push handle.

### Pipe and Fittings

Galvanized steel protected with BRADTECT™ safety yellow coating. Standard wall thickness is 8"– 12". Special order for other wall thicknesses (0"–8" or 12"–18") Special order sizes are non-returnable.


### Water Supply

1-1/4" NPT.


### Recommended Option:

Navigator S19-2100 EFX25  
Emergency Thermostatic Mixing Valve

**NAVIGATOR**



Satisfies ANSI Z358.1-2004  
tepid water requirements.

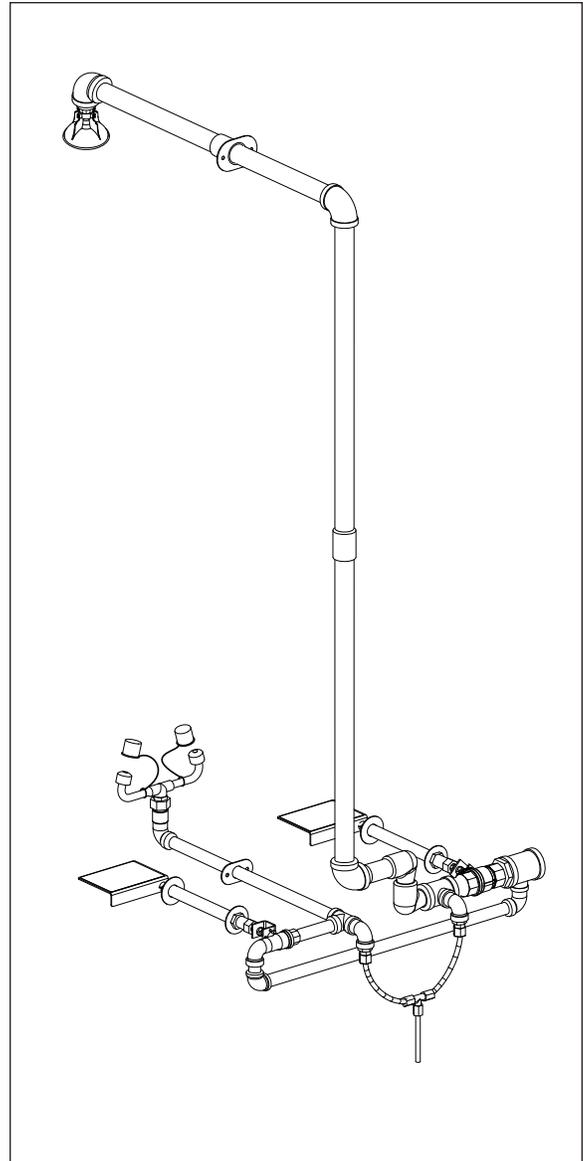

Model	Description
<input type="checkbox"/> S19-310TW	Frost-Proof Drench Shower and Eyewash Unit
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve



Local codes may require the installation of a backflow prevention valve to complete proper installation. Compliance with local codes is the responsibility of the installer. Valve must be tested annually to verify that it is functioning properly. Backflow prevention valves are not included with the fixture and may be supplied by the contractor or purchased from Bradley Corporation.

