

# SPEAKMAN®

SE-590

EYESAVER® EYEWASH

## DESCRIPTION

Portable emergency eyewash. Supplied with stainless steel tank, stay-open full flow ball valve; activated by stainless steel push handle; pressure gauge, air filler, pressure relief valve, twin spray heads with flip-off dust covers, and drench hose activated by a squeeze handle with non-aerated spray nozzle.

## SPECIFICATIONS

**Tank:** 10 gallon stainless steel

**Spray heads:** (2) yellow ABS plastic spray outlets with flip-top dust caps

**Valve:** 1/2" NPT female brass, chrome plated

**Activator:** Stainless steel push handle

**Drench Hose:**

VALVE: 3/8" NPT female brass, chrome-plated

HOSE: 6' reinforced, 750 PSI burst pressure, hose clip for valve and dust cap

**Performance:**

EYEWASH: 0.4 gpm @ 1.5 psi


HAND HELD SPRAY: 1.5 gpm @ 5.6 psi

**Compliance:** ANSI Z358.1

**Universal Emergency Sign Included**

## OPTIONS

- SGN4 Eyewash floor sign
- SSBV Stainless steel ball valve

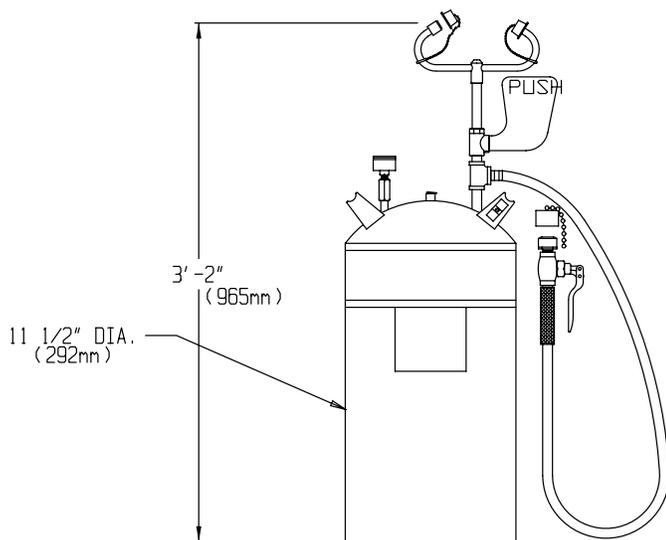

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____