

SPEAKMAN®

SE-695-ADA

COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

The SE-690-ADA Safe-T-Zone® features an eye/face wash with dual spray outlets, flip top dust caps and round bowl combined on a powder coated galvanized stanchion with an impeller action deluge showerhead that is activated by a high visibility yellow pull rod. Unit designed for ADA accessibility.

SPECIFICATIONS

Showerhead: 8" Cicolac® yellow plastic

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT female brass, chrome plated.

Full flow stay open ball valve.

Activator: Extended powder coated yellow, aluminum triangular pull rod.

Inlet & Waste: 1¼" NPT female

Finish: Dura Jade powder coated finish

Performance: 20 gpm @ 20 psi

EYE/FACE WASH: SE-495

Bowl: Yellow ABS plastic

Spray Heads: (2) yellow ABS plastic spray outlets with flip-top dust caps

Valve: ½" NPT female brass, chrome plated

full flow stay-open ball valve

Activator: Stainless steel push handle


Performance: 3.8 gpm @ 30 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- FPV Freeze protection valve
- SPV Scald protection valve
- FLW Flow switch
- HS Hand held spray
- TS Top supply
- SSH Stainless steel showerhead
- SPR Stainless steel pull rod
- SSBV Stainless steel ball valves
- BH Chrome plated brass showerhead

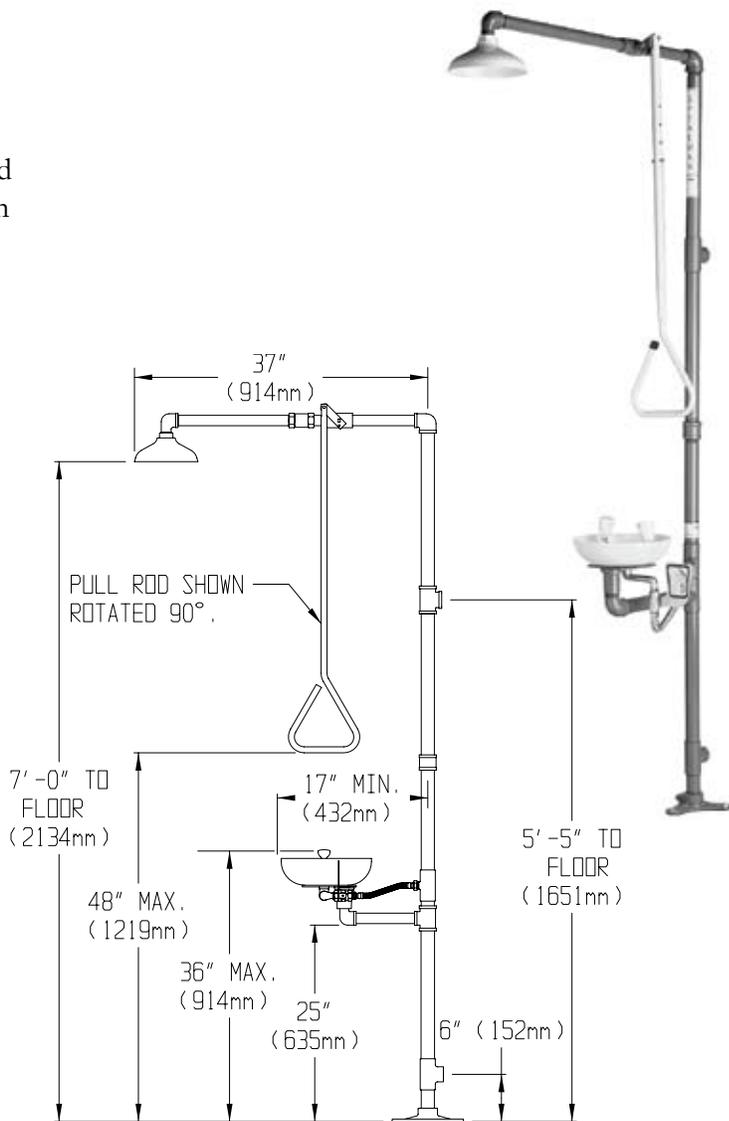

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____