


### AquaSense® Model

**TAG** 

## **Exposed ZEMS6000-IS Model**

# Hardwired Automatic Sensor Flush Valve For Water Closets

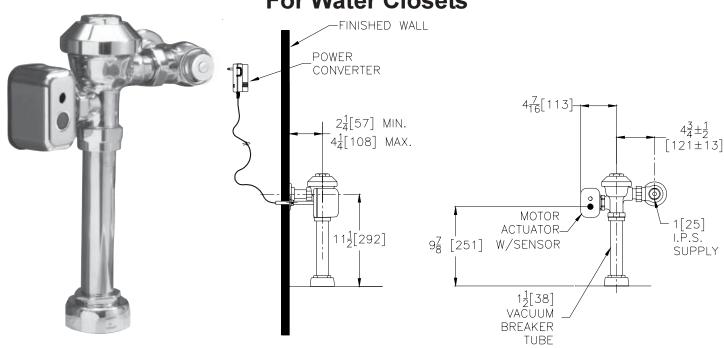

F	ı	0	W	O	p	ti	0	n	S	

☐ -WS1 1.6 Gal. Low Consumption

☐ -FF 4.5 Gal. Full Flush
☐ Standard Flush 3.5 Gallons Per Flush

### Suffix Options (Check/Specify Appropriate Options)

-VC Vandal Resistant Stop Cover

-YB Sweat Solder Kit
-YC Cast Wall Flange

-YJ Split Ring Pipe Support
-YK Solid Ring Pipe Support
-YO Bumper on Angle Stop

Other

### Accessories (Order seperate as specified)

PESS6000-BB Battery Back-up (Up to 8 valves)
P6000-PC6 6VDC Plug-in Power Converter

(Up to 8 valves)

P6000-MJ Mini Junction Box

**P6000-HW6** Hardwire Power Converter

(Up to 8 valves)

**ENGINEERING SPECIFICATION: ZURN ZEMS6000-IS AquaFlush Exposed Hardwired Automatic Sensor Flush Valve For Water** 

Closets- Exposed, quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior. Complete with a chloramine resistant, dual seal diaphragm with a clog resistant by-pass. The valve incorporates a 6 VDC motorized actuator, an integral infrared convergence-type proximity sensor and a manual push-button override into an all-metal, polished chrome plated housing. Sensor range automatically adjusts to its environment at power up and is powered by a 6 VDC power converter. Each power converter can accomodate up to eight flush valves. The valve is complete with high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection. Internal seals are made of chloramine resistant materials.

□ ZEMS6000PL-IS - Aquaflush Plus is furnished as specified above and includes sweat solder kit, vandal resistant stop cap, and cast wall flange with set screw. Complete with a chloramine resistant, dual seal diaphragm with a clog resistant by-pass.

This space is for Architectural/engineering Approval

ZURN INDUSTRIES, INC. & COMMERCIAL BRASS OPERATION & 5900 ELWIN BUCHANAN DRIVE & SANFORD NC 27330

Phone: 1-800-997-3876 & Fax: 919-775-3541 & World Wide Web: www.zurn.com