

## AquaDesign

## **Barrier Free, Pedestal Mounted Drinking Fountain**

## SPECIFICATIONS

Model ABG1500B is a barrier free pedestal mounted, vandal resistant, square drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a green powder coated, heavy duty, 11 gage galvanized steel pedestal. Unit shall be activated by a front mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished chrome plated brass with a non-squirt feature and operate on water pressure range of 20 - 105 psig. Unit shall adhere to ANSI A117.1 and Americans with Disabilities Act of 1990 frontal approach and protruding objects requirements, Adult ADA parallel and frontal approach and ANSI/NSF 61, Section 9.



## ■ Resistant to sunlight, heat, moisture and wear

- 18 gage, 304 stainless steel bowl
- Heavy duty, 11 gage galvanized welded steel, corrosion and scratch resistant finish
- Polished chrome plated brass, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant
- Vandal resistant galvanized steel bottom plate



Member of U.S. Green Building Council



Recyclabl Product



# A C F T I O N A L A C E S S O R I E S (additional costs)

□ - CH30

☐ - FRU1

🗆 - FS Foot spray 🗆 - HB1 Hose bibb, compression, with hose threaded outlet/VB □ - HB2 Hose bibb. loose kev. with hose threaded outlet/VB □ - HB3 Hose bibb, loose key, vandal resistant, hose threaded outlet/VB □ - IGM In-ground 14" mounting □ - JF1 Jug filler, plain end with self-closing valve □ - JF2 Jug filler, recessed, plain end with self-closing valve 🗆 - PF Pet fountain receptor □ "S" Polished stainless steel. lead-free bubbler (Use model ABG1500S)

Freeze resistant valve

Child height, 30" bubbler height

All stainless steel (Use model ABG1400B)

Firehouse red powder coated finish (Use model ABG1600B)

"7" Alpine blue powder coated finish (Use model ABG1700B)

Custom color finishes available upon request

Acorn Aqua™ assumes no responsibility for use of void or suspended data. © Copyright 2009 Acorn Aqua™, City of Industry, CA, A Division of Acorn Engineering Company. Please visit www.acornaqua.com for most current specifications.

Submittal # **ABG1500B** [Sec. B] Rev. D 8/1/09












ACORN AQUA 15125 Proctor Avenue City of Industry, CA 91746 U.S.A. Phone 800-591-9360 626-336-4561 Fax 626-855-4894 www.acornagua.com




## DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Aqua™ assumes no responsibility for use of void or suspended data. © 2009 Acorn Aqua™, a Division of Acorn Engineering Company. Please visit www.acornaqua.com for most current specifications.

## ☐ Standard Model: ABG1500B

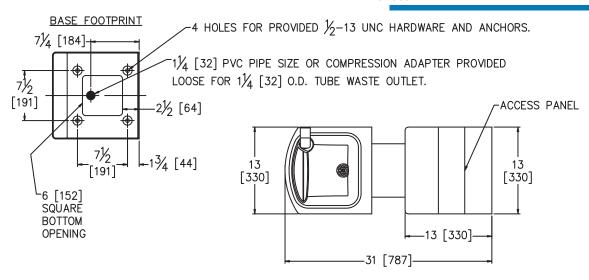

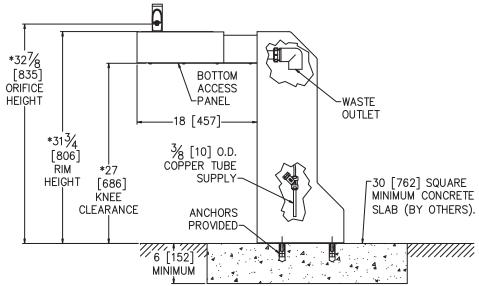

### **GENERAL NOTES:**

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- \*2. STANDARD ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 CHILD HEIGHT MODEL AVAILABLE.
- 3. STOP VALVE NOT PROVIDED.

AquaDesign Barrier Free, Pedestal Mounted Drinking Fountain

Rough-in # **ABG1500B** Rev. B 8/1/09

Five Year Limited Warranty- (Continental United States and Canada Only) The following components are warranted for five years: Compressor, Condenser Coil and Refrigeration Coil. The following components shall only be warranted for a period of one year: Evaporator Can Assembly, Thermostat, Fan Motor, Cartridge, Push Buttons, Compressor Starting Relay/Overload/Capacitor and Activation Linkage. Other parts are warranted for one (1) year from date of installation.

<u>Limited Export Warranty</u>- One (1) year on parts only.

JMMARY L FOR URING	Company			Aqua
SOVAL ACTUI	Model Number & Options		Quantity	TM
APPR ANUF,	Contact	Title		800-591-9360
SELE R	Signature (Approval for Manufacturing)	Date		626-336-4561 www.acornaqua.com