

SENTINEL MARK II®

SM-4070



SM-4071



Shower Combination

GENERAL SPECIFICATION

Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure valve and hand held spray combination. Chrome plated brass wall plate with metal index. Chrome plated brass lever handle. Independent center sleeve allows up to 1" of rough-in variation. Adjustable temperature limit stop. Brass body. Pressure balancing & ceramic temperature regulating cartridge with built-in check valves. Can be installed back-to-back. Roughing-in template. Four port valve with 1/2" female copper sweat inlets and shower outlet (tub outlet 1/2 NPT female). Furnished with 1/2" pipe plug. Chrome plated brass supply ell with wall flange. 69" square lock stainless steel hose with rubber liner. Swivel connector. In-line vacuum breaker. 30" chrome plated brass slide bar with mounting screws. VS-100-AF handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum, to exceed existing ASME A112.18.1/CSA B125.1 standard. Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards.

SM-4070

Anti-scald shower and bath with decorative index.

SM-4071

Anti-scald shower and bath with decorative index and Revere handle.

OPTIONS


SUFFIX	DESCRIPTION
<input type="checkbox"/> IS	Integral stops
<input type="checkbox"/> PC	VS-100-PC handheld shower, chrome finish
<input type="checkbox"/> VH	69" white vinyl hose

This space for Architect/Engineer approval.



Rough-Ins

SM-4070/SM-4071

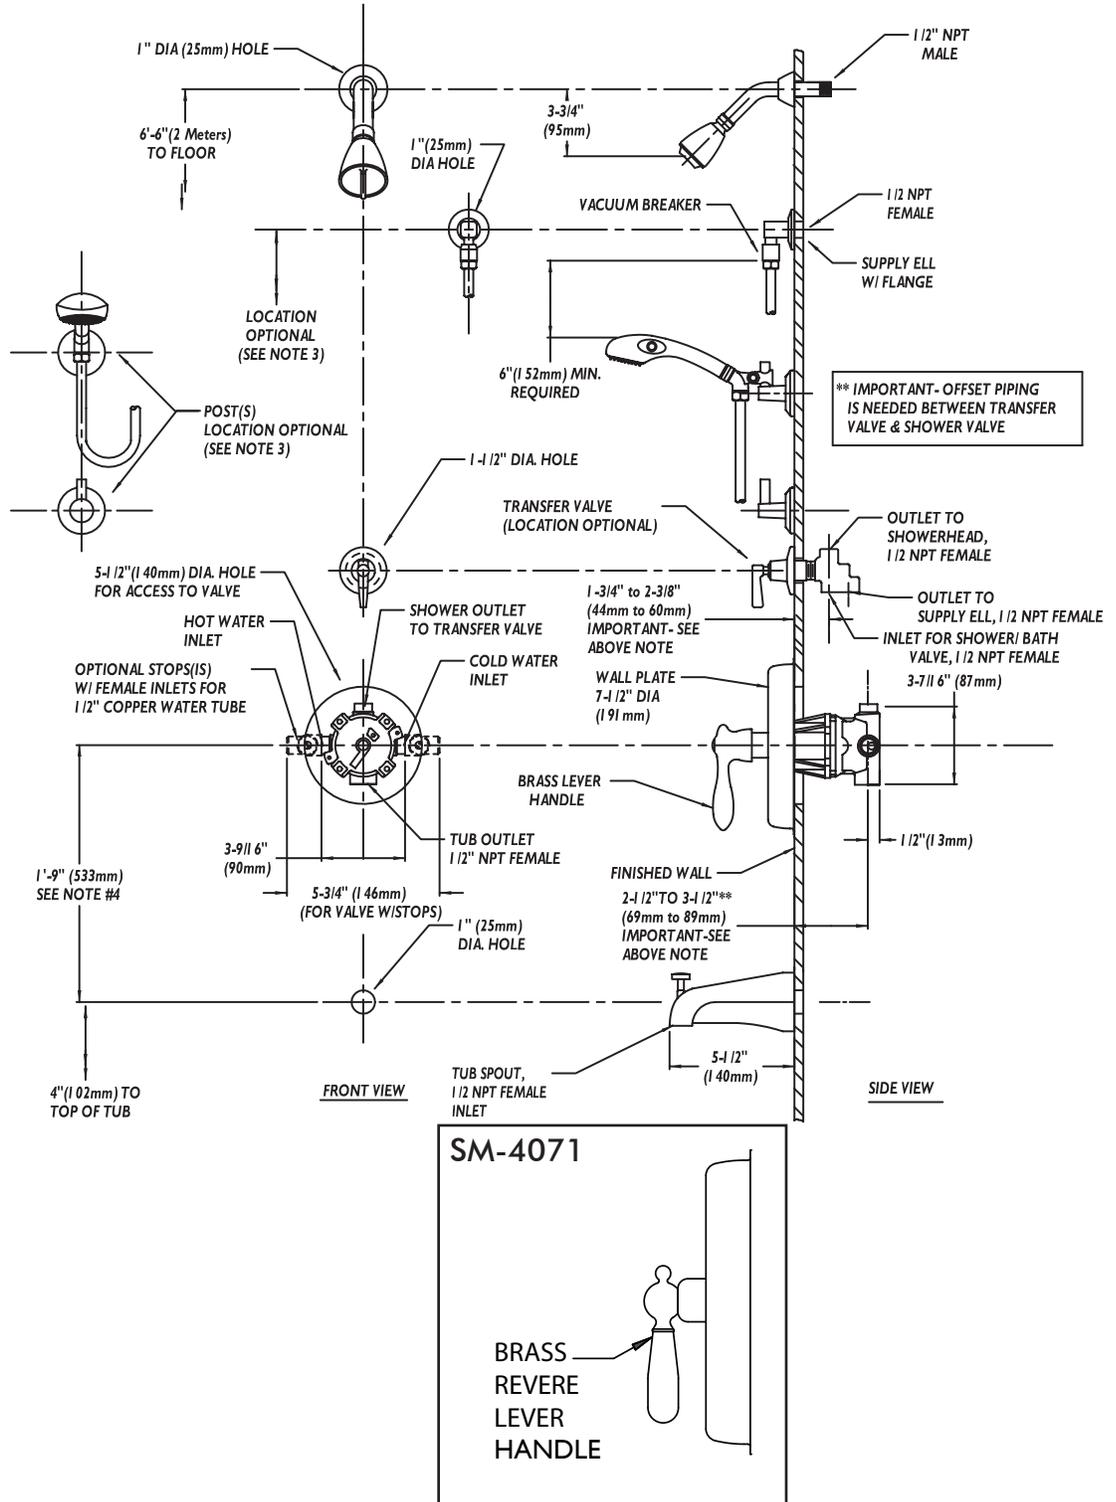

NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. The location of the wall mounted posts and supply ell are optional, but restricted by the 69" hose length running from supply ell connection to hand shower and the 6" minimum requirement between the in-line vacuum breaker & top of hand shower. For ADA mounting locations consult ADAAG, ANSI A117.1, or state regulations.