

Swing-Down Eye and Eye/Face Wash Model S19-270HD (Shown), S19-270HW Model S19-270JD, S19-270JW

- Complies with ANSI Standard Z358.1-2004
- Deck or Wall Mounting Models w/Locking Mechanism
- Chrome-Plated Brass Pipe and Fittings
- Universal Sign and Inspection Tag Included
- Full, One-Year Warranty

Specifications

Unit design saves space and fits easily into any work environment. Eye and eye/face washes operate quickly by pulling swing arm down 90° over sink. Deck or wall mounted design available, both with locking mechanism. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the shank. (S19-270HD and S19-270HW only)

UPC and CUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Construction

Pipe and fittings are chrome-plated brass. Deck or wall mounted models available.

Standard Equipment

Standard Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin, soft flow eye wash heads and protective pop-off sprayhead covers. The integral flow control assures safe, steady flow under varying water supply conditions from 30-90 PSI. (S19-270HD and S19-270HW)

Eye/Face Wash Sprayhead Assembly

Twin perforated disc eye/face wash heads with protective pop-off sprayhead covers. Gentle spray bathes eyes and face. (S19-270JD and S19-270JW)

Valve


Chrome-plated brass 1/2" IPS stay-open valve. Waterflow is activated by pulling swing arm down 90°. Water will continue to flow until arm is returned to original position.


Pipe and Fittings


Chrome-plated brass

Water Supply

1/2" IPS





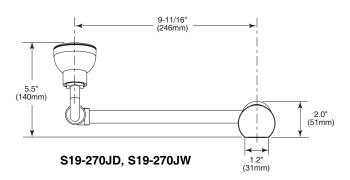

MODEL	
Model No.	Description
□ S19-270HD	Swing-Down Eyewash Fixture – Deck Mount
□ S19-270HW	Swing-Down Eyewash Fixture – Wall Mount
□ S19-270JD	Swing-Down Eye/Face Wash Fixture – Deck Mount
□ S19-270JW	Swing-Down Eye/Face Wash Fixture – Wall Mount



P.O. Box 309, Menomonee Falls, WI 53052-0309 Phone 1-800-BRADLEY FAX 262-251-5817 Web Site: http://www.bradleycorp.com

Document No. 4472

This information is subject to change without formal notice. © 2004 Bradley Corporation 6-2-2005 (1 Page Total)