

ELKAY®

SPECIFICATIONS

WaterSentry® Fresh
Aesthetic Chlorine, Taste and Odor Replacement Filter
Model WSF6000R

GENERAL

Features include Quick-Disconnect, 1/4 turn installation. Automatic inlet shut-off valve that closes when filter is removed. Hands never touch the actual filter media and, therefore, limit the potential for introduction of bacteria. Outer protective wrap. Spun polypropylene prefilter mesh to prevent large, coarse sediment and particles from entering and clogging filter media. High-grade filter is made with activated carbon media. Radial flow-thru design provides more surface area for untreated water while final filter mesh prevents loose carbon from entering water.

Designed to reduce Aesthetic Chlorine, Taste and Odor and Particulate Class I as verified and substantiated by test data.

DESIGN FEATURES

Size: 3-1/4" (82.6mm) O.D. x 12-1/2" (317.5mm) length
Water Inlet Connection: 3/8" (9.5mm) O.D. Tube.
Water Outlet Connection: 1/4" (6.4mm) O.D. Tube.

RECOMMENDED USE CONDITIONS

Filter Capacity: 6000 gal. (22,712 L) or 1 year.
Maximum Flow Rate: 1.5 GPM (5.6 L/MIN).
Water Temperature: 40-100°F (4-38°C).
Initial Pressure Drop: 2-5 PSI (14-34 kPa).
Maximum Line Pressure: 105 PSI (724 kPa).
Minimum Line Pressure: 20 PSI (138 kPa).

INSTALLATION INSTRUCTIONS

The filter must be installed in compliance with all state and local laws and regulations governing the installation and use of this product.

Disconnect electrical power and close water supply valve before proceeding.

The Filter must be installed in the cold water line.


Flow indicator (arrow) on filter should point in the same direction as the water flow.

After installing new filter, open water supply valve and check for leaks. Reconnect electrical power supply. Flush system sufficiently (approximately 3 minutes) to effectively remove small residue of carbon fines.

NOTE: A water shutoff valve (not furnished) should be installed on the incoming water line to aid in future servicing of filter.

CAUTION

- Filter is designed to reduce Aesthetic Chlorine, Taste and Odor. Do not use with water that is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the system.
- Use on cold water line only. Do not allow installed filter to freeze. Do not attach hot water line to filter.
- Filter should be replaced every 6000 gallons (22,712 liters), or approximately 1 year after installation.

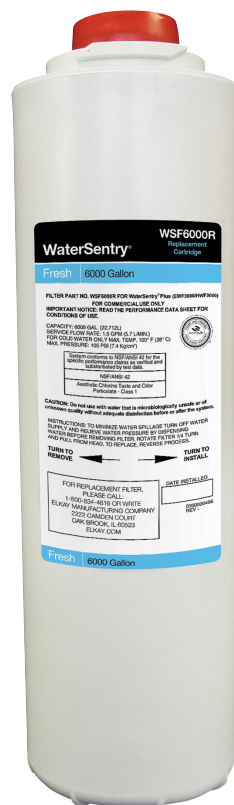

AVAILABLE MODELS

MODEL WSF6000R-2PK is the 2-pack WaterSentry Fresh replacement filters.

WARRANTY

The WaterSentry® Fresh is warranted to be free from defects in material and workmanship for a period of one year from date of installation. Warranty is limited to repair or replacement of defective component.

PRODUCT COMPLIANCE

This filter has been tested to the following NSF International standards: NSF/ANSI Standard 42 for Aesthetic Chlorine, Taste and Odor and Particulate Class I.

