PLUMBING FIXTURES TECHNICAL DATA



Barrier Free Cabinet Mounted Swing-Down Eye and Eye/Face Wash Model S19-281 (Shown), Model S19-291

- Complies with ANSI Standard Z358.1-2004
- Compact, Concealed Fixture
- Chrome-Plated Brass Pipe and Fittings
- Universal Sign and Inspection Tag Included
- Full, One-Year Warranty
- Designed to Mount Between Standard 16" Wall Studs

Specifications

Unit design saves space and fits easily into any work environment. Especially ideal for areas where space is limited. Eye and eye/face washes operate quickly by pulling swing arm down 90° over sink. Eye wash model (S19-281) has an integral flow control in the shank. Unit is flush mounted in the wall.

UPC and CUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Construction

Pipe and fittings are chrome-plated brass. Wall cabinet is stainless steel. Brass stop-valve, tailpiece, and fittings are concealed behind a locked, hinged door for easy access.

Installation

S19-281 requires a rough wall opening of 14-1/2 "W x 30-1/4"H x 4"D. S19-291 requires a rough wall opening of 14-1/2 "W x 30-1/4"H x 6"D. Secure to framing with screws (supplied by intaller) at holes provided.

Standard Equipment

Standard Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin, soft flow eye wash heads and protective pop-off sprayhead covers. Safe, steady water flow under varying water supply conditions is assured by a flow control for 30-90 PSI. (S19-281)

Eye/Face Wash Sprayhead Assembly

Twin perforated disc eye/face wash heads with protective pop-off sprayhead covers. Gentle spray bathes eyes and face. (S19-291)

Valve


Chrome-plated brass 1/2" IPS stay-open valve. Water flow is activated by pulling swing arm down 90° over sink. Water will continue to flow until arm is returned to original position.

Pipe and Fittings

Chrome-plated brass

Water Supply

1/2" IPS

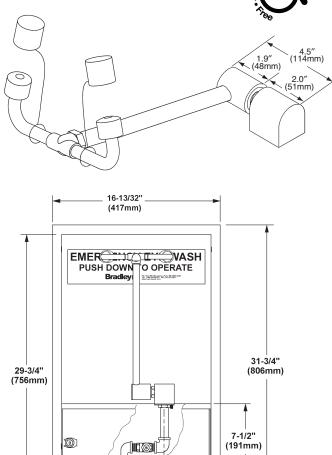

MODEL	
Model No.	Description
□ S19-281	Cabinet Mounted, Swing-Down Eyewash Fixture – Barrier Free
□ S19-291	Cabinet Mounted, Swing-Down Eye/Face Wash Fixture – Barrier Free



P.O. Box 309, Menomonee Falls, WI 53052-0309 Phone 1-800-BRADLEY FAX 262-251-5817 Web Site: http://www.bradleycorp.com

Document No. 4477

This information is subject to change without formal notice. © 2004 Bradley Corporation 6-2-2005 (1 Page Total)