


## TEMP-GARD SHOWER UNIT Z7101-SS-LH TAG



## **ENGINEERING SPECIFICATIONS: ZURN Z7101-SS-LH**

Single handle pressure balancing mixing shower unit, with single bronze stem, stainless steel balancing piston integral with stem assembly, metal lever handle, integral service stops and brass adjustment limit stop screw in cap. Complete with double seal packing, adjustable brass packing nut, and removable brass seats; all exposed trim with polished nickel chrome plated surface. Valve supplied with standard shower head, arm, and flange. The valve inlets and shower outlet are in 1/2" female copper sweat connections.

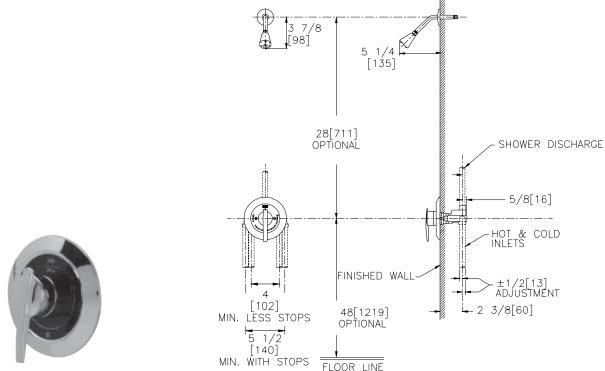

Note: All dimensions are for reference only. Do not use for pre-plumbing

**OPTIONS** (Check/specify appropriate options) Use with Z7000 prefix

**STANDARDS** 

Suffix	<b>Description</b> Te
l	C Back Connections (1/2") (For 90° Installations), va
	Shipped as Loose Adaptors, to be Installed in the Field A
(	C Conversion Cover Plate C
[	T Dial Thermometer SI
l	P 1/2" Female Threaded Connections, Shipped as Loose M
	Adaptors, to be Installed in the Field fo
	IT Metal Cover, Escutcheon & Stem Handle
	C Reverse Connections (For Back-to-Back Installations)
;	C Pair of Dual Spring Check Valves
;	TH ABS Chrome Plated Handle with Screw and Button
\	/F Wall Mounting Flange For Fiberglass or Panel Wall Installation

Tested to meet the following standards for valves and plumbing fittings: ASSE Standard No. 1016 CSA Standard B125-M89 Shower heads meet ANSI A112.18.1 Meets or Exceeds ANSI A117.1M standard for physically handicapped



ZURN INDUSTRIES, LLC COMMERCIAL BRASS OPERATION 2640 SOUTH WORK STREET FALCONER NY 14733 Phone: 1-716-665-1132 Fax: 1-716-665-1135 World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED 🔸 3544 Nashua Drive 🔶 Mississauga, Ontario L4V1L2 🔶 Phone: 905/405-8272 Fax: 905/405-1292