

## TEMP-GARD III SHOWER UNIT


Z7301-SS-MT-DV2P-HW

TAG



## **ENGINEERING SPECIFICATIONS: ZURN Z7301-SS-MT-DV2P-HW**

Single handle pressure balancing mixing shower unit, ceramic control cartridge with stainless steel balancing piston, built in reverse connection capability (To reverse the hot and cold inlets simply remove cartridge and turn 180°), two service stops / check stops, and adjustable limit stop. When valve is turned on it must rotate from cold through to the hot position. All exposed trim and handle are metal with polished nickel chrome plated surface. The valve is supplied with a two-way brass diverter valve, 60" flexible metal hose, 24" mounting slide bar wall connection, (ABS plastic) standard -S1 shower head, arm and flange in chrome plated finish. The valve body is a four port valve with a tub port plug included for shower only applications. The valve inlets, shower and tub outlet are all standard with 1/2" NPT female thread connections. The 1/2" copper sweat options must be specified as shown below.

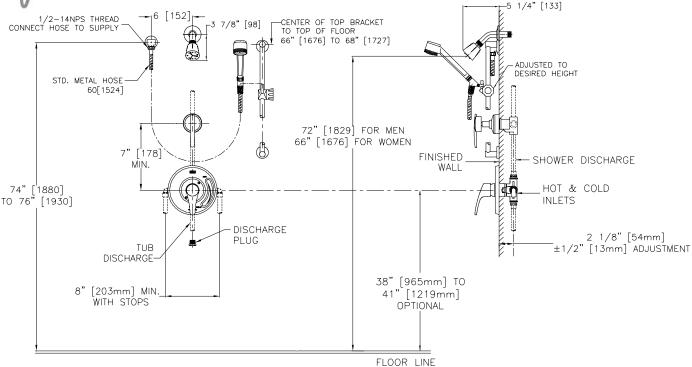

Note: All dimensions are for reference only. Do not use for pre-plumbing.

Parts shown as hidden lines are supplied by others.

Tarte chevit de maderi intes di e cappilea sy cui e ci	
OPTIONS (C	Check/specify appropriate options) Use with Z7300 prefix
Suffix	Description
CPVC	1/2" Male NPT by CPVC Female Adaptors, shipped loose to be
	installed in the field.
EXT	Extension Kit, Extends Valve Out by 1".
PEX	1/2" Male NPT by PEX Adaptors, shipped loose to be installed
	in the field.
SSC	1/2" Female Copper Sweat Connections w/ Service Stops
ST	Sierra Series Decorative Metal Trim
VB	In-Line Vacuum Breaker
WF	Wall Mounting Flange For Fiberglass or Panel Wall Installation
	Handwall Options (See Z7000-HW)
Additional Ontions	

## **STANDARDS**

Tested to meet the following standards for valves and plumbing fittings:

ASSE Standard No. 1016

ASME A112.18.1 / CSA B125.1

IAPMO<sup>®</sup> Listed

Meets or Exceeds ANSI A117.1M standard for physically handicapped



\_\_\_ Z7000-SC Pair of Dual Spring Check Valves

Z7000-S5 Large Brass Shower Head with Spray Adjustment

Z7000-S6 Small Brass Shower Head with Spray Adjustment







ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

Rev. E

Date: 11/9/07

C.N. No.106889

AquaSpec® is a registered trademark of Zurn Industries, LLC ©2007 Zurn Industries, LLC

Dwg. No. 92092

Product No. Z7301-SS-MT-DV2P-HW